


DIGITUS® CAT 6A U/FTP installation cable, 305 m, simplex, Cca, Easy Pull Box

DK-1625-A-VH-305
EAN 4016032435860

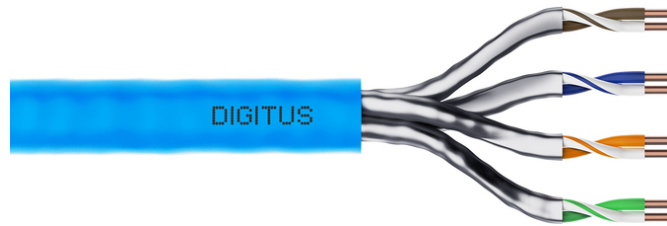

CAT 6A U-FTP installation cable, 500 MHz Cca (EN 50575), AWG 23/1, 305 m easy pull box,

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Cca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) for the assessment and verification of constancy of performance: System 3
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.5 mm (Eca); 0.6 mm (Dca); 0.8 mm (Cca); 0.8 mm (B2ca)
- Outer casing color: Light blue (RAL 5012)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +75 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter: 7.0 mm (Eca); 7.2 mm (Dca); 7.6 mm (Cca); 7.6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @ 100-500 MHz;
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Phase delay: 450 nS/100 m max.
- Time delay: 25 nS/100 m max.
- Separation class: "c" according to EN 50174-2
- NVP: 70%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-FTP, parovi u metalnoj foliji
- CPR: Cca
- Duljina: 305 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	15.11	33.00	20.00	30.00	19,800.00
Packaging Unit Inside	1	15.11	0.00	0.00	0.00	0.00
Packaging Unit Single	1	15.11	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:



DIGITUS

CRS **BZca** **Cca** **Dca** **Eca** **AWG** **500 MHz** **10 Gbit Ethernet** **CAT 6a** **Eca** **LSZH** **CFR class**

1+ **3**

s1a **d1** **a1**

S **d** **a**

DIGITUS

DK-1623-A-VH-305 // CAT 6a, U/FTP Installation Cable, 305 m, Simplex, Eca

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-A-VH-305 // CAT 6a, U/FTP Installation Cable, 305 m, Simplex, Eca

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdaten **Produkt-Information** **Physikalische Spezifikationen** **Physical Properties**

Elektrische Eigenschaften **Electrical Properties** **Mechanische Eigenschaften** **Mechanical Properties**

DIGITUS

Leitungsgruppen-Transmission Properties

PAIR	STP	WGT	PAIRSET	WGT	PAIR	WGT	PAIRSET	WGT
1	23	35	10	35	35	35	10	35
2	23	35	10	35	35	35	10	35
3	23	35	10	35	35	35	10	35
4	23	35	10	35	35	35	10	35
5	23	35	10	35	35	35	10	35
6	23	35	10	35	35	35	10	35
7	23	35	10	35	35	35	10	35
8	23	35	10	35	35	35	10	35
9	23	35	10	35	35	35	10	35
10	23	35	10	35	35	35	10	35

Intertek **ETL**

ETL Verified Certificate of Customer Approval 1H4228007-001

Product: CAT 6a U/FTP 10/100/1000 Ethernet Network Cable
 Manufacturer: Digitus Electronics Co., Ltd.
 Location: Shenzhen, China

GHMT

Certificate No. 16688-12 **Zertifikat** No. 16688-12

Category 6a **Kategorie 6a**

GHMT Type Approval


DIGITUS

AWG 23/1 **500 MHz** **10 Gbit Ethernet** **CAT 6a** **Eca** **LSZH** **CFR class**

CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca

DIGITUS

CAT 6a **CAT 6** **CAT 5e** **CAT 5** **CAT 4** **CAT 3**

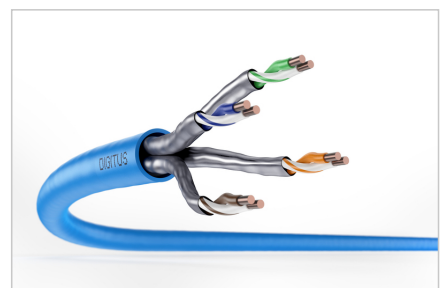

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com