


DIGITUS Prespojni kabel, Kat.6 U/UTP, tanki

DK-1617-030S
EAN 4016032459989

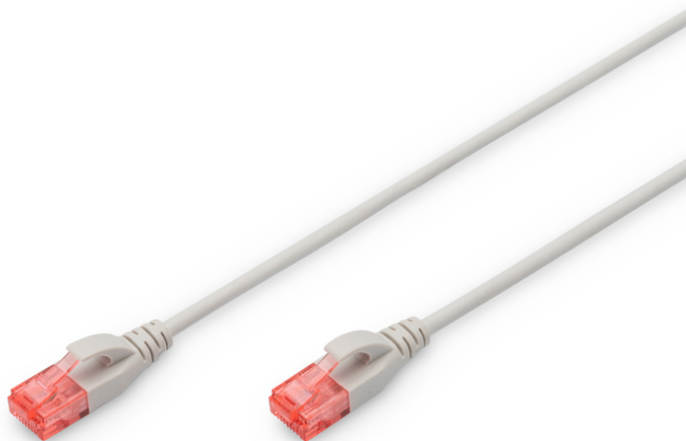

CAT 6 U-UTP Slim patch cord, Cu, LSZH AWG 28/7, length 3 m, color grey

DIGITUS® tanki prespojni kabeli imaju mali vanjski promjer i savitljivi plašt. Tanki dizajn omogućava različite načine uporabe u Vašoj mreži. Nadalje, DIGITUS® tanki prespojni kabeli proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 standardima Kat.6. Garantiraju sukladnost ugrađenog sustava ožičenja zahtjevima specifikacija ISO & EN kanala i odlične performanse DIGITUS® kabliranja Kat. 6. Performanse su testirane na brzinama do 250 MHz uključujući karakteristike performansi kao što je gubitak preslušavanje na bližem kraju ("NEXT"). Specifičan dizajn DIGITUS® prespojnih kabela osigurava različite mogućnosti uporabe. Svaki kabel opremljen je s pregibnicom i zaštitom. Pregibnica je opremljena sa zaštitom polugice mikroutikača. Kategoriju 6 možete jednostavno prepoznati po crvenoj boji mikroutikača.

Osigurava fleksibilno ranžiranje kabela i štedi prostor.

- 2x RJ45 konektora (8P8C)
- Pregibnica sa zaštitom
- Duljina kabela na pregibnici
- Unutarnji vodiči: Bakar (Cu)
- Bez halogena: da
- Raspored kontakata: 1:1
- Kategorija: 6
- Presjek AWG: 28

- Pregibnica: odlivena
- Konektor 1 tip: RJ45 8(8)
- Konektor 2 tip: RJ45 8(8)
- Dizajn kabela: 4x2
- Vatrootporan: da
- Boja pregibnice: Siva
- Za zaštitom polugice: da
- NVP vrijednost: 76
- Otporan na ulja sukladno EN 60811-404: ne
- Radijus savijanja: 4D (vanjski promjer kabela x 4)
- Boja plašta: Siva
- Dužina: 3 m

Attributes


- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: U-UTP, neoklopljeno
- Duljina: 0.5 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 28/7, upletena parica
- Tanka verzija: Da
- Flat Version: Ne

Package contents

- Prespojni kabel, Kat.6 U/UTP, tanki, LSZH

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	150	9.10	32.00	50.00	21.00	33.60
Packaging Unit Inside	1	0.06	25.00	17.00	0.90	382.50
Packaging Unit Single	1	0.06	25.00	17.00	0.90	382.50
Net single without Packaging	0	52.00	15.00	15.00	0.90	202.50

More images:

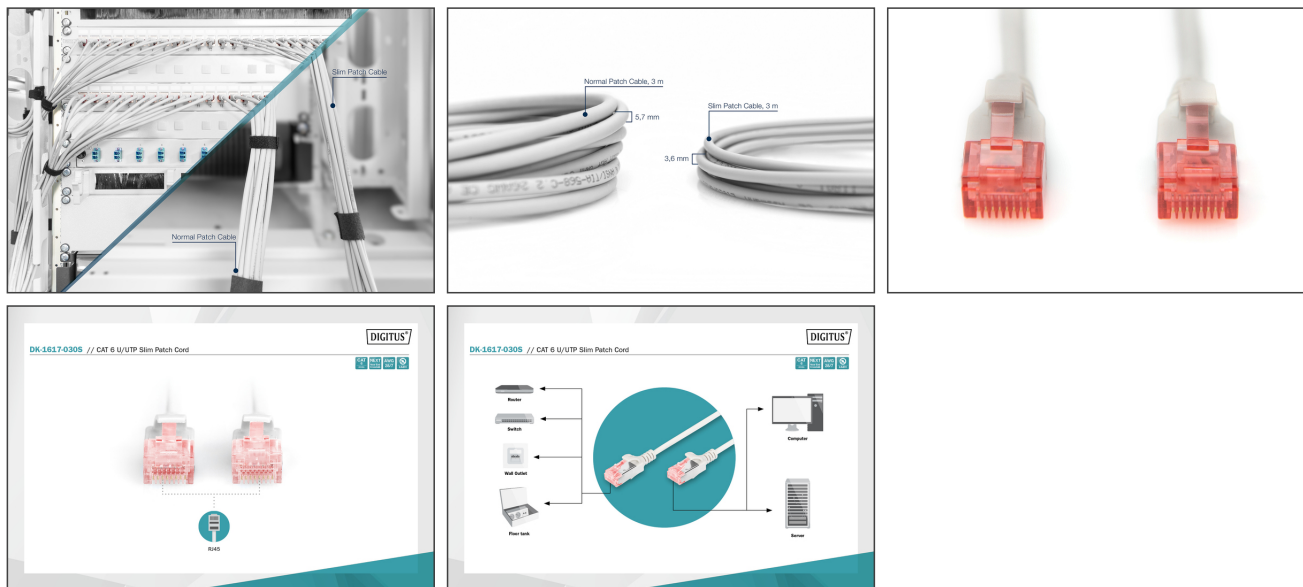

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com