

# DIGITUS® CAT 6A U/UTP slim patch cord

DK-1617-A-010S

EAN 4016032461715



**CAT 6A U-UTP slim patch cord, Cu, LSZH AWG 28/7, length 1 m, color grey**

DIGITUS® slim patch cords are characterised by their small outer diameter and flexible sheath. Slim design enables versatile use in your network. Moreover, The DIGITUS® Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk (“NEXT”). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

**Enables flexible and space-saving cabling in your network**




- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- Bending radius: 4D (outer diameter x 4)
- outer diameter: 3,65 mm

**Attributes**

- Konfiguracija: 1:1
- Kategorija: CAT 6A
- Oklop: U-UTP, neoklopljeno
- Duljina: 1 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 28/7, upletena parica
- Tanka verzija: Da
- Flat Version: Ne

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	7.20	32.00	50.00	21.00	33.60
Packaging Unit Inside	10	0.29	25.00	19.00	23.00	10.93
Packaging Unit Single	1	0.03	17.00	17.00	21.00	6.07
Net single without Packaging	0	0.02	15.00	15.00	0.60	135.00

**More images:**

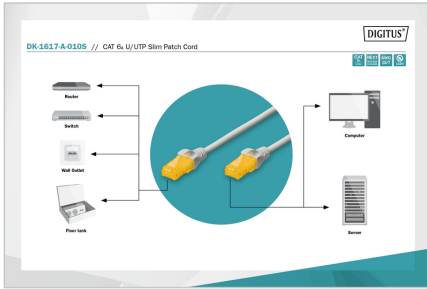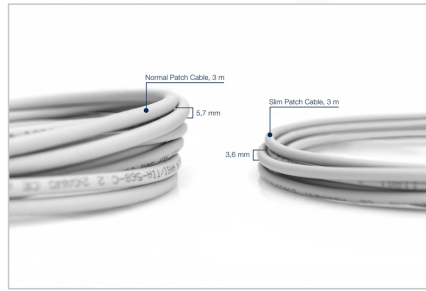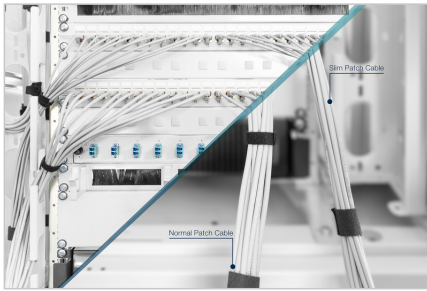

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)