

# DIGITUS CAT 6A U/UTP slim patch cord

DK-1617-A-020S  
EAN 4016032461722



## CAT 6A U-UTP Slim patch cord, Cu, LSZH AWG 28/7, length 2 m, color grey

DIGITUS® slim patch cords are characterised by their small outer diameter and flexible sheath. Slim design enables versatile use in your network. Moreover, The DIGITUS® Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

## Enables flexible and space-saving cabling in your network

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- Bending radius: 4D (outer diameter x 4)
- outer diameter: 3,65 mm


## Attributes

- Konfiguracija: 1:1
- Kategorija: CAT 6A
- Oklop: U-UTP, neoklopljeno
- Duljina: 2 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 28/7, upletena parica
- Tank verzija: Da
- Flat Version: Ne

## Logistics

|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³    |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|--------|
| Packaging Unit Carton        | 200             | 8.60           | 32.00         | 50.00         | 21.00          | 33.60  |
| Packaging Unit Inside        | 1               | 43.00          | 25.00         | 17.00         | 0.80           | 340.00 |
| Packaging Unit Single        | 1               | 43.00          | 25.00         | 17.00         | 0.80           | 340.00 |
| Net single without Packaging | 0               | 35.00          | 15.00         | 15.00         | 0.80           | 180.00 |

**More images:**

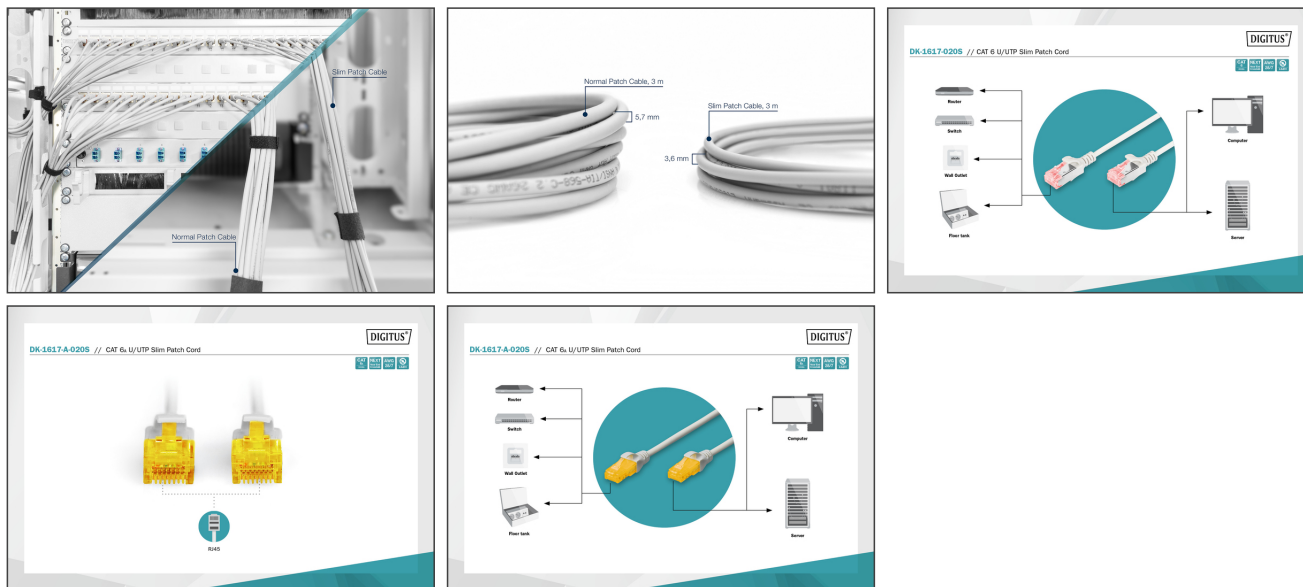

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)