

# DIGITUS USB-C - HDMI Video Adapter Cable, UHD 4K / 30 Hz

DA-70821

EAN 4016032465072



## USB-C - HDMI Adapter, 1.8 m 4K/30Hz, black, metal housing

The DIGITUS® USB-C to HDMI adapter cable enables you to connect your notebook or tablet to a monitor, projector or TV device to the USB-C connection. No additional adapters are required. Depending on the source device, this cable supports resolutions of up to 4K / 30 Hz incl. 3D and ARC support. This cable also supports data transfer rates of up to 5 Gbps as well as the USB 3.1 features. You won't need any additional adapters or converters. Simply use the DIGITUS® adapter cable USB-C on HDMI.

## Transmits an HDMI signal in UHD 4K via the USB-C interface

- Supported resolutions: 4K / 30 Hz (3840 x 2160p), 1080p@120Hz, 720p, 480p
- Data transfer rate: 5 Gbps
- Chipset: Realtek-RTD2171U
- USB 3.1 Gen 1
- Supports 4K 3D, Full HD 3D HFR
- Supports ARC
- Supports YUV 4:4:4
- Supports HDCP 2.0
- Supports HDMI 1.4b
- Supported color depth: 12 bit
- Supports Consumer Electronic Control (CEC)
- Supports Lip Sync (audio/video synchronization)
- Supports Multi-Stream audio/video
- Supports 21:9 Cinemascope
- Supports 32 channel audio
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability
- Supports DTS-HD Master Audio bitstream
- Supports Super Audio CD (DSD)

- Supports DVD audio
- Supports Blu-ray Disc and HD DVD audio and video
- Supports EDID 2.0 (device recognition)
- Supports DVI Version 1.0
- Latency: Zero frame delay
- Power consumption: 250 mW max.
- Compatible operating systems: Windows 10/8/8.1/7, MacOS® (OS X), Android, Chromebook Pixel
- Operating humidity: 20% - 80% RH
- Operating temperature: -10°C ~ +50°C
- Length: 1.8 m
- Cable sheath: PVC
- Connector housing: Aluminum
- Dimensions: L 46 x W 37.6 x H 13.2 mm
- Weight: 62 g
- Manufacturer's notice:
- Your device equipped with USB-C must support the DisplayPort video mode (DP Alt Mode) in order to be compatible with this adapter/converter.
- The video output capabilities depend on your notebook's graphic card and the connected monitor. Some screens also limit the available resolution.

## Attributes


- HDTV-norma: Ultra HD 4K
- Konektor 1: USB C, utikač
- Konektor 2: HDMI tip A, utikač
- USB-C proizvodi: Da

## Package contents

- USB-C - HDMI Video Adapter Cable, UHD 4K / 30 Hz

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	7.50	38.10	30.20	31.10	0.00
Packaging Unit Inside	10	0.94	22.50	15.00	15.00	0.00
Packaging Unit Single	1	0.09	22.50	15.00	1.50	506.25
Net single without Packaging	0	58.00	22.00	18.00	0.50	198.00

**More images:**

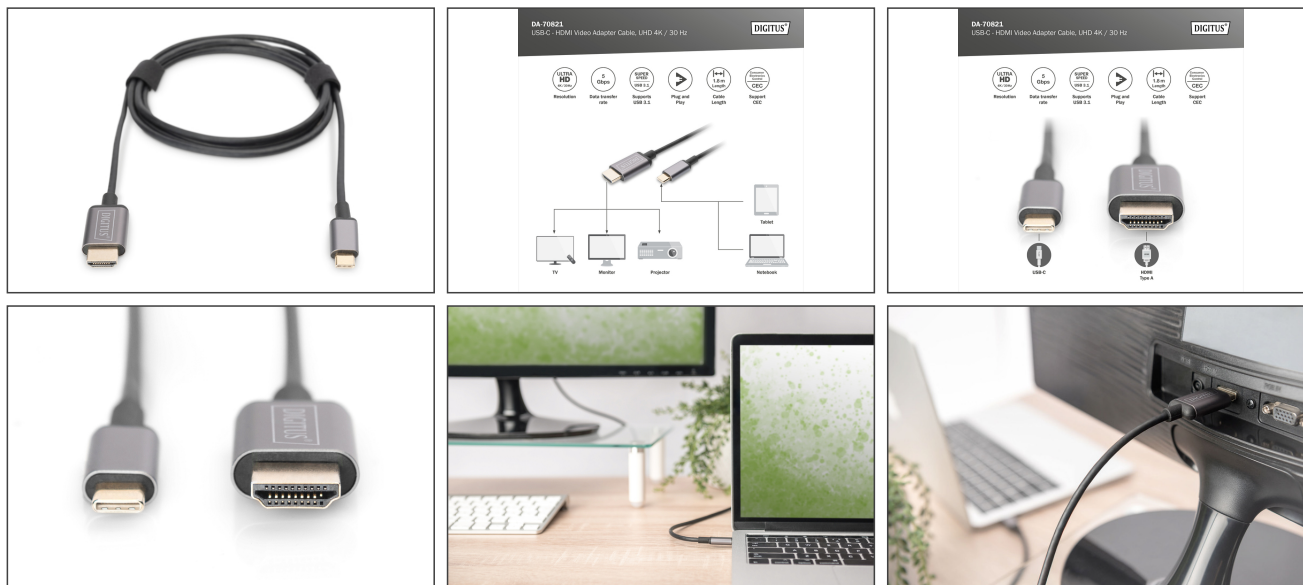

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schöffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)