

DIGITUS 3-in-1 charging cable

DB-300160-002-S
EAN 4016032466208



USB charger cable, Lightning+micro B+Type-C 0.15m, 3 in 1 cable, cotton, CE, bl

The DIGITUS® 3-in-1 charging cable is ideal for charging your portable devices on a power supply, PC or other device with a USB-A port. Use a single cable to charge all your devices. Its compact dimensions make this cable an ideal companion for home, office or travel.

3-in-1 multi-charging cable for connecting devices with a USB-C, micro-USB or 8-pin connector to a USB-A port

- Supported charging power: 10 W (5 V / 2 A)
- Operating temperature: -10 °C to +50 °C
- Operating humidity: 0 - 75%
- Port 1: USB-A, male

- Connector 2: Apple, male/ □Micro-USB, male/ □USB-C, male


Attributes

- AWG: 30
- Kabel u boji: crni
- Kapice: Metalno kućište
- Konektor 1: USB A, utikač
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.15 m
- oklop: bez oklopa
- USB-C proizvodi: Da

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
| Packaging Unit Carton | 40 | 7.50 | 29.00 | 55.00 | 20.00 | 31.90 |
| Packaging Unit Inside | 10 | 1,875.00 | 26.50 | 27.50 | 9.00 | 0.00 |
| Packaging Unit Single | 1 | 0.19 | 7.50 | 23.50 | 2.00 | 352.50 |
| Net single without Packaging | 0 | 0.03 | 46.80 | 15.00 | 0.30 | 210.60 |

More images:

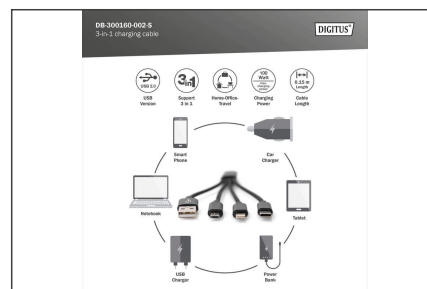

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com