


DIGITUS® Active Mini DisplayPort Adapter / Converter, DP to HDMI

DB-340416-002-W
EAN 4016032468769

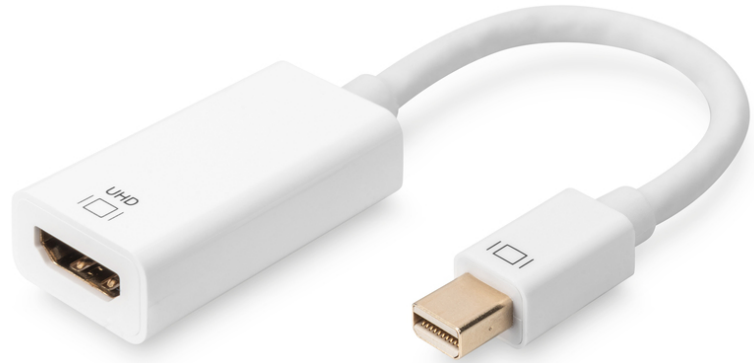

DisplayPort adapter cable, mini DP - HDMI type A M/F, 0,2m, HDMI 2.0, active, CE, gold, wh

The 4K Mini DisplayPort to HDMI Adapter / Converter (Mini DisplayPort plug to HDMI jack) enables you to reproduce content from your computer or notebook directly onto your TV. It supports a resolution of up to 4096 x 2160p. Your images, videos, documents, presentations etc. can be displayed in Ultra HD and optimally presented during meetings or for private use.

Converts Mini DisplayPort signals to HDMI signals up to 4K resolution

- HDCP 1.3 compatible
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)

Attributes

- AWG: 32

- Blokiranje: nema
- DisplayPort standard: DisplayPort 1.2
- Feritni filter: nema
- HDTV-norma: Ultra HD 4K
- Kabel u boji: bijeli
- Kapice: ukalupljeno
- Konektor 1: Mini DP, utikač
- Konektor 2: HDMI tip A, priključak
- Površina konektora: poniklano
- Duljina: 0.2 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Package contents

- 1 x Active Mini DisplayPort Adapter / Converter, DP to HDMI

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	7.20	52.00	29.00	39.00	58.81
Packaging Unit Inside	20	1.80	27.00	25.00	17.00	11.48
Packaging Unit Single	1	0.09	23.50	7.50	2.30	405.38
Net single without Packaging	0	0.09	2.46	0.45	1.50	1.66

More images:



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com