

DIGITUS Variable Notebook Stand with integrated USB-C™ Hub, 5 Port

DA-90424

EAN 4016032475293



Notebook Riser with 5 Port USB 3.0 Hub PD Charging, silver

The adjustable notebook stand from DIGITUS® combines ergonomic design and connectivity in one convenient unit. You can easily adjust the angle of inclination to your height in 5 levels. Your notebook can be connected via the USB-C™ port, allowing you to access all USB interfaces of the hub. 4 fully-functional USB A ports (USB 3.2 Gen1) and a USB-C™ power with Power Delivery are available. An optional USB-C™ power adapter, for example, delivers up to 100 W of charging power (Power Delivery) for a connected notebook and the USB-A ports (85 W / 15 W). Use the advantages of ergonomic design and connectivity in a single unit with the DIGITUS® notebook stand with integrated USB hub.

Flexibly adjustable, Mobile Notebook Stand with integrated USB Hub incl. USB-C™ Power Delivery - Foldable

- 1 x USB-C™ connection: USB 3.2 Gen 1, SuperSpeed, 5 Gbps max.
- 1 x USB-C™ connection: Power Delivery 3.0 (85 W max. / Fast Role Swap)
- 3 x USB A connections: USB 3.2 Gen1, SuperSpeed, 5 Gbps (5 V / 0.9 A)
- 1 x USB A connection: USB 3.2 Gen1, SuperSpeed, 5 Gbps (5 V / 1.5 A)

- Charging power of all USB A connections: 15 W max.
- Compatible with notebooks, tablets from many manufacturers
- Suitable for notebooks with a screen diagonal of 10" - 17"
- Slim frame design for optimal notebook cooling
- Adjustable angle of inclination: 15° - 36°
- Operating temperature: 0 ° to +45 °C
- Operating humidity: 10% to 90% RH (non-condensing)
- Storage temperature: 0 °C to 70 °C
- Storage humidity: 10% to 90% RH (non-condensing)
- Frame material: Aluminum
- Dimensions: W 25.2 x D 18.5 x H 6 cm
- Weight: 300 g
- Manufacturer's notice:
- An optional power adapter is required in order to use the charging function via Power Delivery.

Attributes




- Vrsta: Podizač za prijenosno računalo

Package contents

- 1 x Variable Notebook Stand with integrated USB-C™ Hub, 5-Port
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	14.60	29.00	37.00	34.00	36.48
Packaging Unit Inside	10	3.65	8.50	27.00	32.00	7.34
Packaging Unit Single	1	0.37	27.00	7.50	2.50	506.25
Net single without Packaging	0	0.29	25.30	6.00	1.85	280.83

More images:

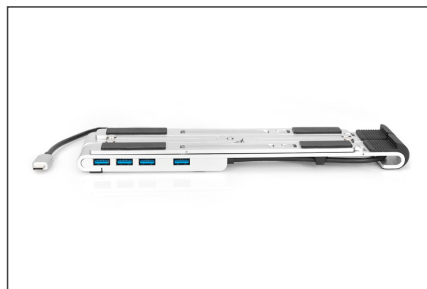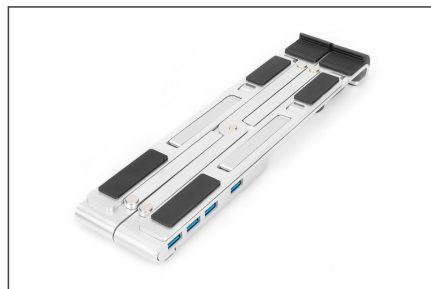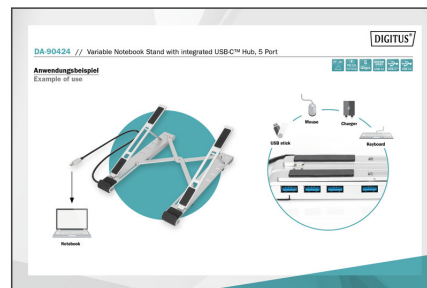

Safety notes

- Please read the entire manual before starting assembly and installation. Please contact your local dealer if you have any questions about the instructions or warnings.
- CAUTION: Use with products that exceed the permitted weight may result in damage or possible injury.
- Brackets should be fitted in accordance with the installation instructions. Incorrect installation can result in damage or injury.
- Use safety equipment and suitable tools. The product should only be installed by specialists.
- This product can be installed on timber-framed, solid concrete or stone walls.
- The load-bearing surfaces should be able to safely withstand the entire weight of appliances and all additional components.
- Only use the installation screws supplied and DO NOT TIGHTEN the screws TOO TIGHT.
- This product contains small parts that can cause a choking hazard if swallowed. Keep these parts away from children.
- Only use this product indoors. Using the product outdoors can lead to injuries and damage.
- IMPORTANT: Before installation, please check all components received against the components list. If parts are damaged or missing, ask your local dealer for replacement parts.
- MAINTENANCE: Check the bracket regularly for safety and stability (preferably every three months).

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>

info@assmann.com