

# DIGITUS Gigabit Ethernet PCI Express Network Card

DN-10130-1  
EAN 4016032478645



**Gigabit Ethernet PCI Express Card 32-bit, low profile bracket, Realtek RTL8111H**

Gigabit Ethernet PCI Express Card, 32-bit, low profile bracket, Realtek chipset

**Unprecedented speed is now available over your existing network cabling - Built to run the fastest network applications**

- Compliant with 10/100/1.000 IEEE 802.3 specification
- Supports 10/100/1.000 Mbps auto negotiation
- Connection: 1x RJ45 LAN
- Chipset: Realtek RTL8111H
- Supports Auto MDI/MDIX crossover at all speed
- Compliant with PCI Express base specification 1.1



- Single-lane (or X1) PCI Express throughput supports rates of 2.5Gbps
- Additional Low Profile Bracket to use the Card also in Thin Computers
- Operating temperature: 0 °C - 55 °C
- Operating humidity: 0% - 85% RH (non-condensing)
- Supports Windows 10, 8.1, 8, 7, Win-Server2008 / 2016, Linux, VMWare, FreeBSD


**Package contents**

- Gigabit Ethernet PCI Express network card
- Low profile bracket
- Quick installation guide
- Support CD-ROM

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 40           | 6.00        | 37.00      | 42.50      | 30.50       | 0.00            |
| Packaging Unit Inside        | 1            | 0.15        | 0.00       | 0.00       | 0.00        | 0.00            |
| Packaging Unit Single        | 1            | 0.15        | 14.00      | 20.00      | 3.50        | 980.00          |
| Net single without Packaging | 0            | 36.00       | 7.60       | 12.00      | 2.20        | 200.64          |

**More images:**

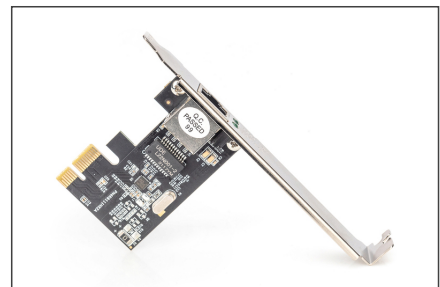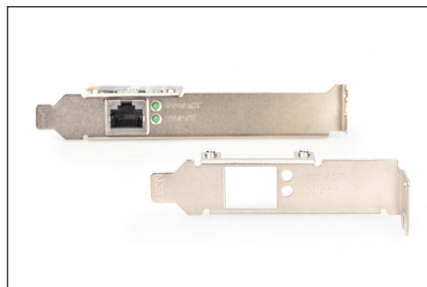

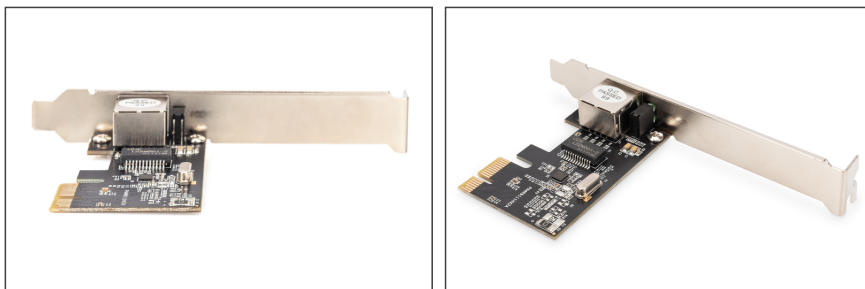**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)