

DIGITUS® Gigabit Ethernet PCI Express Network Card

DN-10130-1

EAN 4016032478645



Gigabit Ethernet PCI Express Card 32-bit, low profile bracket, Realtek RTL8111H

Gigabit Ethernet PCI Express Card, 32-bit, low profile bracket, Realtek chipset

Unprecedented speed is now available over your existing network cabling - Built to run the fastest network applications

- Compliant with 10/100/1.000 IEEE 802.3 specification
- Supports 10/100/1.000 Mbps auto negotiation
- Connection: 1x RJ45 LAN
- Chipset: Realtek RTL8111H
- Supports Auto MDI/MDIX crossover at all speed
- Compliant with PCI Express base specification 1.1


- Single-lane (or X1) PCI Express throughput supports rates of 2.5Gbps
- Additional Low Profile Bracket to use the Card also in Thin Computers
- Operating temperature: 0 °C - 55 °C
- Operating humidity: 0% - 85% RH (non-condensing)
- Supports Windows 10, 8.1, 8, 7, Win-Server2008 / 2016, Linux, VMWare, FreeBSD

Package contents

- Gigabit Ethernet PCI Express network card
- Low profile bracket
- Quick installation guide
- Support CD-ROM

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 40 | 6.00 | 37.00 | 42.50 | 30.50 | 47,961.20 |
| Packaging Unit Inside | 1 | 0.15 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.15 | 14.00 | 20.00 | 3.50 | 980.00 |
| Net single without Packaging | 0 | 0.04 | 7.60 | 12.00 | 2.20 | 200.64 |

More images:

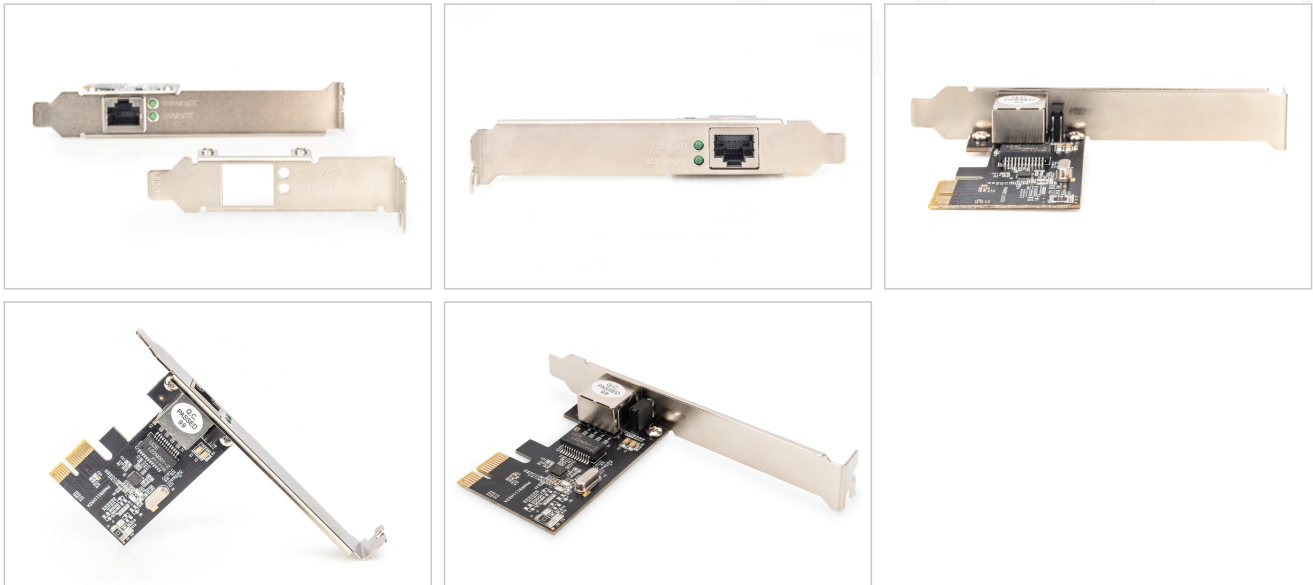

Safety notes

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com