

# DIGITUS® USB Type-C™ 4 K 2-in-1 Mini DisplayPort + VGA Graphics Adapter

DA-70825

EAN 4016032478737



**USB-C - mini DP + VGA Adapter, 20 cm 4K/30Hz, silver, aluminum housing**

With the DIGITUS® USB-C™ to Mini DisplayPort + VGA Adapter Cable, you can connect a monitor or TV with Mini DisplayPort or VGA connection to the USB-C™ connection of your notebook or tablet, and transfer audio to your sound system. No additional adapters are required. Depending on the source device, this cable supports resolutions of up to 4K / 30 Hz. Thanks to Plug and Play, you don't have to install any drivers or change any settings – Just plug in and get started. You won't need any additional adapters or converters. Simply use the DIGITUS® adapter cable USB-C™ to Mini DisplayPort + VGA adapter cable.

**Transmits video and audio signals from a USB-C™ port to a Mini DisplayPort or VGA interface in resolutions of up to 4K Ultra HD**

- 4K Ultra HD (UHD) resolution with 4096 x 2160p / 30Hz
- Power supply is provided via the integrated USB-C™ interface on the adapter
- Supports DisplayPort 1.4
- Supports HDR10
- Supported color depth: 12 bit
- Supports Lip Sync (audio/video synchronization)
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability


- Supports DTS-HD Master Audio bitstream
- Supports EDID 1.6 (device recognition)
- Operating humidity: 20% - 80% RH
- Operating temperature: -10°C ~ +50°C
- Supported operating systems: Android 10.0, Chrome OS 86.0, macOS 11.0.1, Windows 8.1, Linux 5.4, iPad Pro (3rd) or higher versions
- Suitable for PCs or notebooks with USB-C™ port
- High-quality plastic housing
- Cable adapter length: 20 cm
- Dimensions: L 200 x W 62 x H 15.2 mm
- Weight: 51 g
- Color: Space gray
- Manufacturer's notice: The video output capabilities depend on your notebook's graphic card and the connected monitor. Some screens also limit the available resolution. Your device equipped with USB-C™ must support the DisplayPort™ video mode (DP Alt Mode) in order to be compatible with this adapter/converter.

**Package contents**

- 1 x USB-C™ 4 K 2-in-1 Mini DisplayPort + VGA Graphics Adapter
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	9.40	20.50	39.80	53.00	43,242.70
Packaging Unit Inside	1	0.09	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.09	2.00	9.10	20.50	373.10
Net single without Packaging	0	59.90	20.00	1.52	6.20	188.48

**More images:**

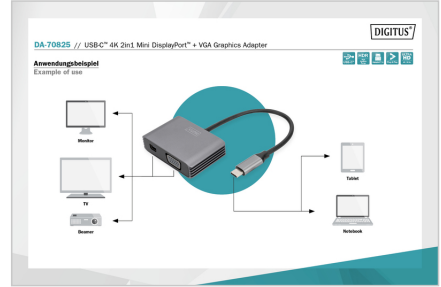

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)