

# DIGITUS USB Type-C™ 4K 2-in-1 DisplayPort + VGA Graphics Adapter

DA-70827

EAN 4016032478768



## USB-C - DP + VGA Adapter, 20 cm 4K/30Hz, silver, aluminum housing

With the DIGITUS® USB-C™ to DisplayPort + VGA Adapter Cable, you can connect a monitor, projector or TV with DisplayPort or VGA connection to the USB-C™ connection of your notebook or tablet. No additional adapters are required. Depending on the source device, this cable supports resolutions of up to 4K / 30 Hz. Thanks to Plug and Play, you don't have to install any drivers or change any settings – just plug in and get started. You won't need any additional adapters or converters. Simply use the DIGITUS® adapter cable USB-C™ to DisplayPort + VGA adapter cable.

### Transmits video and audio signals from a USB-C™ port to a DisplayPort or VGA interface in resolutions of up to 4K Ultra HD

- 4K Ultra HD (UHD) resolution with 4096 x 2160p / 30Hz
- Power supply is provided via the integrated USB-C™ interface on the adapter
- Supports HDCP 2.2
- Supports DisplayPort 1.4
- Supported color depth: 12 bit
- Supports Lip Sync (audio/video synchronization)
- Supports 21:9 Cinemascope
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability


- Supports DTS
- Supports EDID 1.6 (device recognition)
- Operating humidity: 20% - 80% RH
- Operating temperature: -10°C ~ +50°C
- Supported operating systems: Android 10.0, Chrome OS 86.0, macOS 11.0.1, Windows 8.1, Linux 5.4, iPad Pro (3rd) or higher versions
- Suitable for PCs or notebooks with USB-C™ port
- High-quality aluminum housing
- Cable adapter length: 20 cm
- Dimensions: L 200 x W 62 x H 15.2 mm
- Weight: 50 g
- Color: Black
- Manufacturer's notice: The video output capabilities depend on your notebook's graphic card and the connected monitor. Some screens also limit the available resolution. Your device equipped with USB-C™ must support the DisplayPort™ video mode (DP Alt Mode) in order to be compatible with this adapter/converter.

### Package contents

- 1 x USB Type-C™ 4K 2-in-1 DisplayPort + VGA Graphics Adapter
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	9.30	20.50	3,908.00	53.00	0.00
Packaging Unit Inside	1	93.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	93.00	2.00	9.10	20.50	373.10
Net single without Packaging	0	59.00	20.00	1.52	6.20	188.48

**More images:**

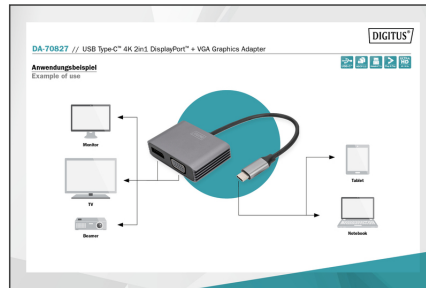

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)