

# DIGITUS® Wireless HDMI transmitter for Click & Present Mini (DS-55319)

DS-55320

EAN 4016032478799



### Wireless HDMI Transmitter (TX) additional unit for DS-55319

With the wireless presentation system, you can transmit HDMI® video and audio signals in Full HD over up to 50 m with a direct line of sight. Commissioning and operation are very simple. Plug & play - simply connect and get started. The set can be expanded to (a total of) up to 16 receiver units (DS-55320). Switch quickly and easily to the desired transmitter at the touch of a button and share your content. You can also share content directly from your mobile device (smartphone/tablet) via the mobile device's operating system without the need for an additional app. The transmitter can be powered via the HDMI port of your PC (> 500 mA required). For safe and stable operation, we recommend always powering the transmitter and receiver via the micro USB cable. Thanks to the compact design of the transmitter and receiver, setup is quick, easy and customizable - the perfect solution for meeting and conference rooms.

### Additional transmitter unit for the Wireless Presentation System (DS-55319)

- Wireless HDMI signal transmission up to 50m (unobstructed view)
- Supports resolutions up to 1920x1080p
- Radio channel: IEEE 802.11ac, 5 GHz, 2T2R
- HDMI version: 1.4
- HDCP version: 1.3
- AES 128 bit encryption
- WPA2 protocol
- Authentication protocol: WPA2 (WPAS-PSK / WPA2-Enterprise)

- Supports Windows, macOS
- Connections per unit: 1x HDMI plug, 1x micro-USB socket
- Power supply: HDMI socket (0.5A required) or via micro USB (DC 5V/0.5A)
- Connection button with LED status indicator
- Audio: Stereo, 16 bit / 48 KHz
- ABS housing
- Power consumption: approx. 2.5W
- Compression: H.264
- Operating temperature: 0-40°C
- Dimensions (1 unit): L 8.3 x W 3.2 x H 1.3 cm
- Weight (1 unit): 27 g
- Color: black
- The transmission distance with limited visibility cannot be determined across the board and depends on the conditions on site
- Walls, glass, etc. shorten the signal coverage or cause signal loss

### Attributes


- KVM: no
- PoE (Power over Ethernet): no

### Package contents

- 1x transmitter unit
- 1x Micro-USB cable (0.5 m)
- 1x HDMI extension cable (0.15 m)
- 1x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	5.60	23.00	37.00	31.00	26.38
Packaging Unit Inside	1	0.19	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.19	8.00	12.50	5.00	500.00
Net single without Packaging	0	0.03	8.30	3.20	1.30	34.53

**More images:**

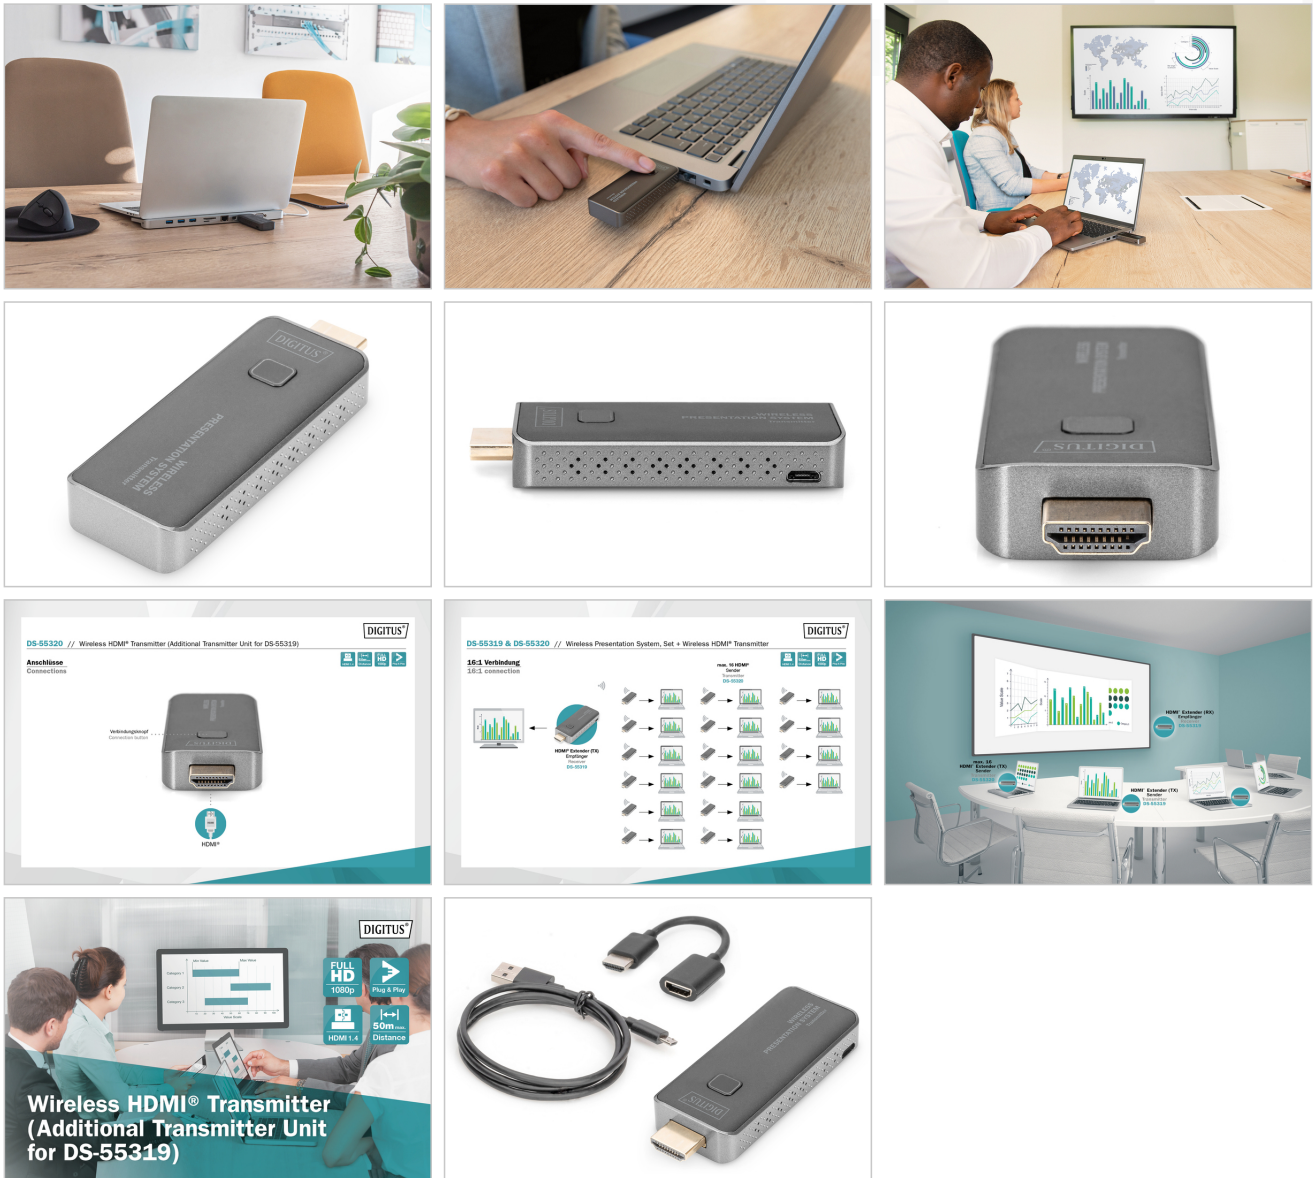

**Safety notes**

- Please read these instructions carefully before using the appliance and keep them for future reference.
- For indoor use only.
- Do not use the device in a damp environment or near water.
- Do not expose the product to extremely high or low temperatures, strong light sources or direct sunlight.
- This product is not a toy. Keep it out of the reach of children.
- Do not connect the adapter to the mains until you have made sure that the mains voltage corresponds to the value specified on the rating plate.
- Never connect the power supply unit if it is damaged. In such cases, please contact your supplier.
- Disconnect the AC/DC mains adapter from the power supply if the appliance is not to be used for a longer period of time.
- Never open the product: The appliance may contain parts with lethal voltage. Repairs or maintenance should only be carried out by qualified personnel.
- Improper use, modifications or repairs carried out by the user will invalidate all warranties.
- - We accept no product responsibility for improper or non-intended use of the product.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>

---

info@assmann.com