

DIGITUS® 4K HDMI adapter cable - HDMI to DisplayPort

AK-330111-020-S
EAN 4016032481119



HDMI to DP Adapter Cable, ext. Power via USB - A 2.0m, Ultra HD, 4K@60Hz, bi

Expand your workplace with the DIGITUS 4K HDMI adapter cable from HDMI to DisplayPort. Simply connect your laptop or PC to a second monitor and benefit from a better overview and increased productivity. The cable transmits video and audio signals in razor-sharp 4K quality (3840 x 2160 @ 60 Hz) with brilliant colors and clear sound reproduction in 7.1 surround sound. In most cases, the power supply via the HDMI connection is sufficient. The additional USB-A plug can be connected for a stable power supply if required.

This HDMI to DisplayPort adapter cable makes it easy to connect an HDMI input to a DisplayPort output and transmit picture and sound in 4K quality.

- Ultra HD resolutions up to 4K (3840 x 2160 @ 60 Hz)
- Resolutions up to 2K at 30 Hz
- Full HD resolution up to 1920 x 1080 at 120 Hz
- 7.1-channel surround audio support
- Vivid colors thanks to 48-bit Deep Color support
- Support for 3D video formats
- Compatible with Embedded DisplayPort (eDP)
- Precise color reproduction thanks to 16-bit RGB/YCC conversion

- Automatic color conversion between YUV and RGB
- Compatible with HDMI 2.0 and DisplayPort 1.2
- HDCP 1.4 and DPCP - Compatible for protected content
- Connection 1: HDMI type - A (plug)
- Connection 2: DisplayPort (plug)
- Connection 3: USB- A (power supply)(plug)

Attributes


- AWG: 30
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: plastic
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Package contents

- 1x 4K HDMI adapter cable - HDMI to DisplayPort

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	8.00	32.00	50.00	21.00	33.60
Packaging Unit Inside	10	1.33	4.80	40.00	35.00	6.72
Packaging Unit Single	1	0.13	1.20	25.00	14.00	420.00
Net single without Packaging	0	0.13	1.20	20.00	9.00	216.00

More images:

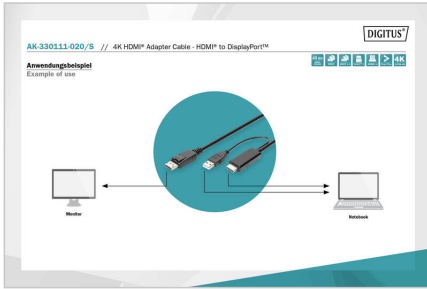

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com