

# DIGITUS® 4K DisplayPort Adapter Cable, DP - HDMI Type A

DB-340202-018-S  
EAN 4016032481249



## DisplayPort Adapter Cable, Type DP-HDMI A M/M, 1.8m, w/LED, Alu Housing, 4K@30Hz, gold, bl

The 4K DisplayPort Adapter Cable enables the direction connection of a PC or notebook with a DP output to an HDMI device, such as a TV or monitor. The adapter cable is a must-have accessory. With this adapter cable, your next gaming session or home cinema experience will be displayed in razor-sharp definition. When used with Mac devices, the cable supports mirroring or extension mode and when used with Windows devices it supports duplication or extension mode. No external power supply is required for this adapter cable.

### Avoid adapters with a Plug and Play cable adapter that does not require external power supply

- Supports HDMI 2.0 features
- Supports up to 4K/2K with 30Hz
- Supports 3D with a resolution of 4K
- Supports HDCP and DPCP
- Core material: CU
- Dolby TrueHD capable
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability
- Supports DTS-HD master audio bitstream
- Supports Super Audio CD (DSD)
- Supports DVD-Audio
- Supports Blu-Ray Disc and HD-DVD audio and video

- Cable diameter: 6.3 mm
- Operating temperature: -20 ~ 60°C
- Storage temperature: -10 ~ 50°C
- Operating humidity: 0 - 95% RH
- Weight: 54g
- Hood: Aluminum housing

### Attributes


- AWG: 32
- Color cable: black
- Connector 1: DP, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: Aluminum
- Interlock: Snap fastener
- Length: 1.8 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Package contents

- 4K DisplayPort Adapter Cable, DP - HDMI Type A (1.8 m)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	9.50	36.00	39.00	25.00	35.10
Packaging Unit Inside	10	0.95	22.00	22.00	6.00	2.90
Packaging Unit Single	1	0.10	16.00	16.00	2.00	512.00
Net single without Packaging	0	0.08	13.00	13.00	2.50	422.50

**More images:**

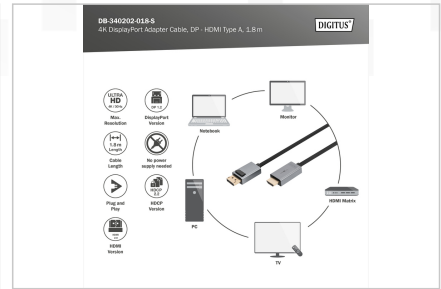

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)