

# DIGITUS Audio Connection Cable, 3.5 mm jack to 3.5 mm jack

DB-510110-018-S  
EAN 4016032481270



## AUX Audio Cable Stereo 3.5mm Male to Male Aluminum Housing ,Gold plated, NYLON Jacket, 1,8m

The Aux/Jack Cable with 3.5 millimeter jack plugs (plug to plug) transfers audio signals in brilliant quality to headphones, headsets or speakers – from smartphones, PCs, MP3 players, car radios and other devices with 3.5 mm Aux connection. The gold-plated contacts deliver the highest transmission quality and perfect audio transmission.

### Gold-plated plug for long-lasting and undisturbed sound

- 3.5 stereo jack plug <=> 3.5 mm jack plug


- Optimally suited for iPhones, iPads, smartphones, car radio, loudspeaker, TV, PC, etc.
- Nylon mesh, protects the cable from knotting


### Attributes

- AWG: 28
- Kabel u boji: crni
- Konektor 1: 3,5 mm stereo utikač
- Konektor 2: 3,5 mm stereo utikač
- Površina konektora: pozlaćeno
- Duljina: 1.8 m
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	300	10.80	36.00	39.00	32.00	44,928.00
Packaging Unit Inside	10	0.36	22.00	22.00	9.00	4,356.00
Packaging Unit Single	1	36.00	10.00	11.00	1.00	110.00
Net single without Packaging	0	28.00	12.00	11.00	1.50	198.00

## More images:

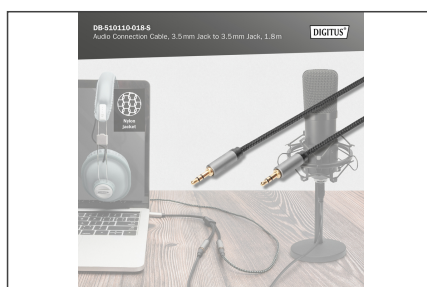

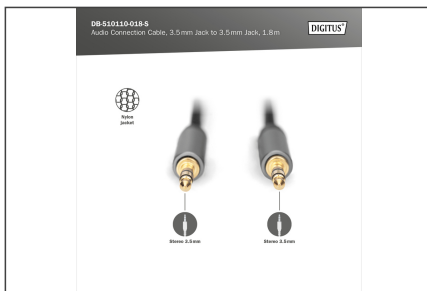**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)