

DIGITUS® Audio Headset Adapter, 3.5 mm jack to 2x 3.5 mm socket

DB-510320-002-S
EAN 4016032481324



Stereo 3.5mm Headset Adapter, M to 2*F Aluminum Housing ,Gold plated, NYLON Jacket 0,2m

The Digitus Audio Headset Adapter comprises a 3.5 mm jack plug and two jack sockets. This adapter makes it possible to connect a headset with two 3.5 mm jack plugs (microphone + headphones) to your device (PC, notebook etc.) with a single 3.5 mm audio output. The microphone and headphone input are marked on the jacks.

The Headset Adapter has two 3.5 mm connections for separate headphone and microphone connection and can be connected to the single/individual audio connection of a notebook.

- Y distributor cable from 3.5 mm jack plug to 2x 3.5 mm jack (microphone + headphones)



- Aluminum housing
- Nylon mesh
- Gold-plated plug

Attributes

- AWG: 28
- Color cable: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 2x 3.5mm stereo jack
- Connector surface: gold-plated
- Length: 0.2 m
- Shielding: Double shielding

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 120 | 4.08 | 34.00 | 43.00 | 41.00 | 59.94 |
| Packaging Unit Inside | 1 | 0.03 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.03 | 11.00 | 11.00 | 4.00 | 484.00 |
| Net single without Packaging | 0 | 0.01 | 10.00 | 10.00 | 3.00 | 300.00 |

More images:

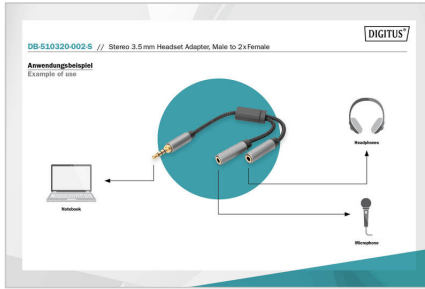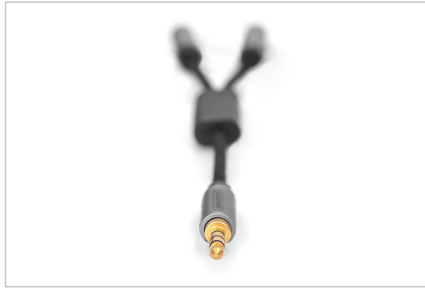

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com