

# DIGITUS® Socket strip with aluminum profile and switch, 8-way CEE 7/5, 2 m supply cable with earthing contact plug

DN-95402-1-FR

EAN 4016032481959



## 1U Aluminum PDU, rackmountable, 8x CEE 7/5 rated power: 16A, 4000W, 250VAC 50/60Hz,

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. It can be mounted horizontally or vertically and, depending on the cabinet type, the socket strip can be mounted with the outlets facing upwards or downwards.

### Safe and professional power supply in the 19" range

- Horizontal 19" installation in the rack
- Switch - secured against unintentional switch-off
- Rotation of the cans: 45°
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: safety plug, 230 Vac / 16 A

- Output: 8 x CEE 7/5, max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m
- Rated voltage: 230-250 VAC, 50/60 Hz
- Dimensions: 482.6 mm (19") x 45 (1U) x 45 mm (HxWxD)

### Attributes

- Dodatne mogućnosti: Prekidač za uključivanje napona
- Mjerenje: PDU mjerenje
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Ulazni utikač: IEC 60309 16A 1ph/N/PE 6h
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")


### Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 10           | 9.80        | 19.50      | 52.00      | 29.50       | 29.91           |
| Packaging Unit Inside        | 1            | 0.98        | 0.00       | 0.00       | 0.00        | 0.00            |
| Packaging Unit Single        | 1            | 0.98        | 9.70       | 51.00      | 5.80        | 2,869.26        |
| Net single without Packaging | 0            | 0.86        | 4.50       | 48.26      | 4.40        | 955.55          |

**More images:**

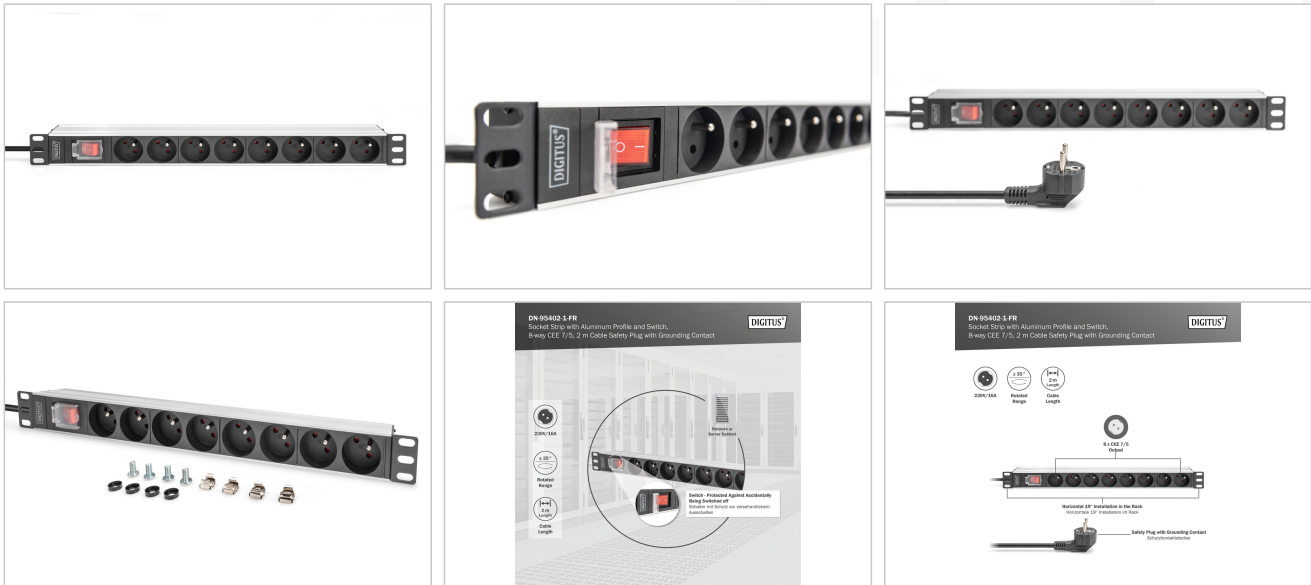

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet – Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)