

# DIGITUS® USB-A - USB-C spiral cable, 1m

AK-300430-006-S  
EAN 4016032482543



**USB - Type A to USB - Type C Spring cable TPE USB 2.0, PD60W Max; 1m**

With the DIGITUS® USB 2.0 - USB - A to USB - C spiral cable, you can charge your smart devices such as smartphones, tablets, etc. The charging power is 60W (20V/3A) You can also synchronize your data with your PC or laptop, with a data transfer rate of 480 Mbps. Thanks to its flexible length and spiral design, it can be used anywhere. Perfect for the car, for charging your smartphone or as a spare cable for your desk, as the cable can be easily stored anywhere.

**Flexible and heavy-duty spiral cable for charging and synchronizing**

- Data transfer rate up to 480 Mbps
- Supports the USB PD (Power Delivery) specification - charging power of 60W (20V/3A)


- USB Type-C plug can be used on both sides
- Cable length: 0.32m
- Usable length/extendable up to: 1m

**Attributes**

- AWG: 32
- Color cable: black
- Connector 1: USB A, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 1 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	6.75	44.00	51.50	29.00	65.71
Packaging Unit Inside	1	0.03	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.03	21.00	11.50	0.02	4.83
Net single without Packaging	0	0.03	1.00	100.00	1.00	100.00

**More images:**

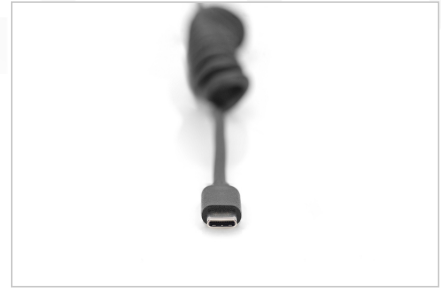

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)