

# DIGITUS USB 3.0 Hub 4-Port, Industrial Line

DA-70257

EAN 4016032490470



## USB 3.0 HUB, 4 Port, Industrial, Metal 15-kV ESD, Table, Wall, DIN Rail mount

The DIGITUS® Industrial USB 3.0 Hub is ideal for industrial applications due to its metal housing. It can be mounted on the wall or on a carrier rail and is connected to a computer, notebook or server with the included USB 3.0 cable. It supports USB 3.0 superspeed with a data transfer rate of up to 5 Gbit/s, at the same time the hub is downward compatible to USB 2.0 and USB 1.1. The hub can be powered via a two-wire terminal block connector (+9V to 24V). Optionally, an external power supply can be connected to the DC jack.

### Expands a computer with USB A port with 4 additional USB A super-speed ports.

- USB 3.0 metal HUB with four downstream ports
- Battery Charging Specification BC1.2 (SDP), maximum 18 W (3.6 A @ 5 V)
- Power supply: +9 V to +24 V DC via terminal block or DC jack (Dimensions: (OD) 5.50mm x (ID) 2.0mm (L) x 10mm)
- Automatic detection of input polarity at the power terminal block

- ESD protection up to 15 kV for all ports
- Includes detachable wall mounting kit and DIN rail kit
- Compact industrial design with metal housing
- Weight: 285 g
- Colour: black
- Dimensions: L 13,9 x W 6,9 x H 2,5 cm
- Operating temperature: 0°C - 40°C (35°F to 100°F)

### Attributes

- Broj priključaka: 4
- USB-A (3.0) konektori: 5
- USB-norma: USB 3.0 / 3.1


### Package contents

- 1 x USB HUB
- 1 x cable USB A plug to USB B plug, length approx. 2 m
- 2 x wall mounting plates with screw package
- 1 x Top-hat rail mounting: 25 mm
- 1 x 3 pin terminal block
- Manual

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	11.72	28.50	42.00	40.00	47.88
Packaging Unit Inside	1	586.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	586.00	14.00	18.70	5.00	1.31
Net single without Packaging	0	285.00	6.87	13.90	2.51	239.69

**More images:**

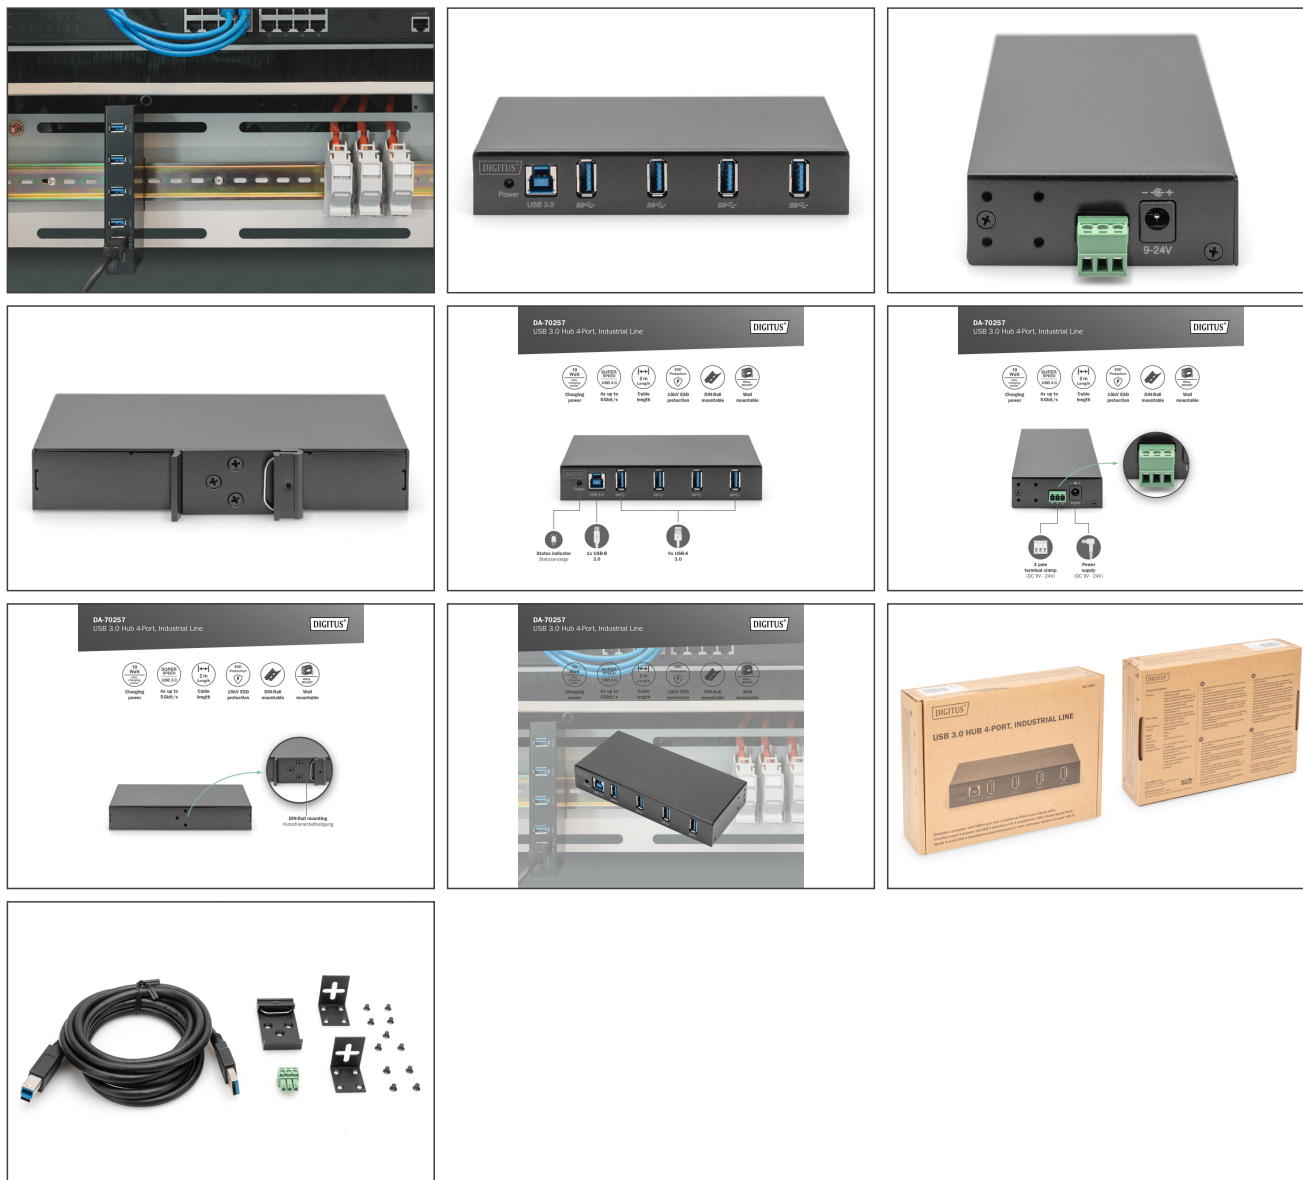

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)