

DIGITUS® Lightning silicone connection cable, USB-A - Lightning 0.5m, black

AK-600108-005-S
EAN 4016032495864



USB Silicone charging cable, USB-A - Lightning 0.5m, USB 2.0, 12W, black

Reliable and easy connection to your Lightning devices with your PC thanks to the soft and flexible silicone cable. Data transfer rate of 480 Mbits/s for synchronization, data transfer and a power delivery specification of 12W for charging.

Fast charging and synchronization with the high-quality and soft silicone connection cable

- Supports data transfer rates of 480 Mbit/s
- Backwards compatible with USB 2.0 and USB 1.1
- Supports the USB power delivery function with 5V, 2.4A and 12W


- Durable cable with a service life of up to 25,000 bends (based on internal tests)
- MFI-certified

Attributes

- AWG: 22
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: Apple Lightning 8-polni, utikač
- Konektor 2: USB A, utikač
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.5 m
- oklop: jednostruki oklop

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 250 | 6.38 | 21.00 | 32.00 | 50.00 | 33,600.00 |
| Packaging Unit Inside | 10 | 0.26 | 1.35 | 24.00 | 30.00 | 972.00 |
| Packaging Unit Single | 1 | 0.03 | 0.55 | 21.00 | 11.50 | 131.62 |
| Net single without Packaging | 0 | 0.02 | 0.45 | 12.00 | 10.00 | 54.00 |

More images:

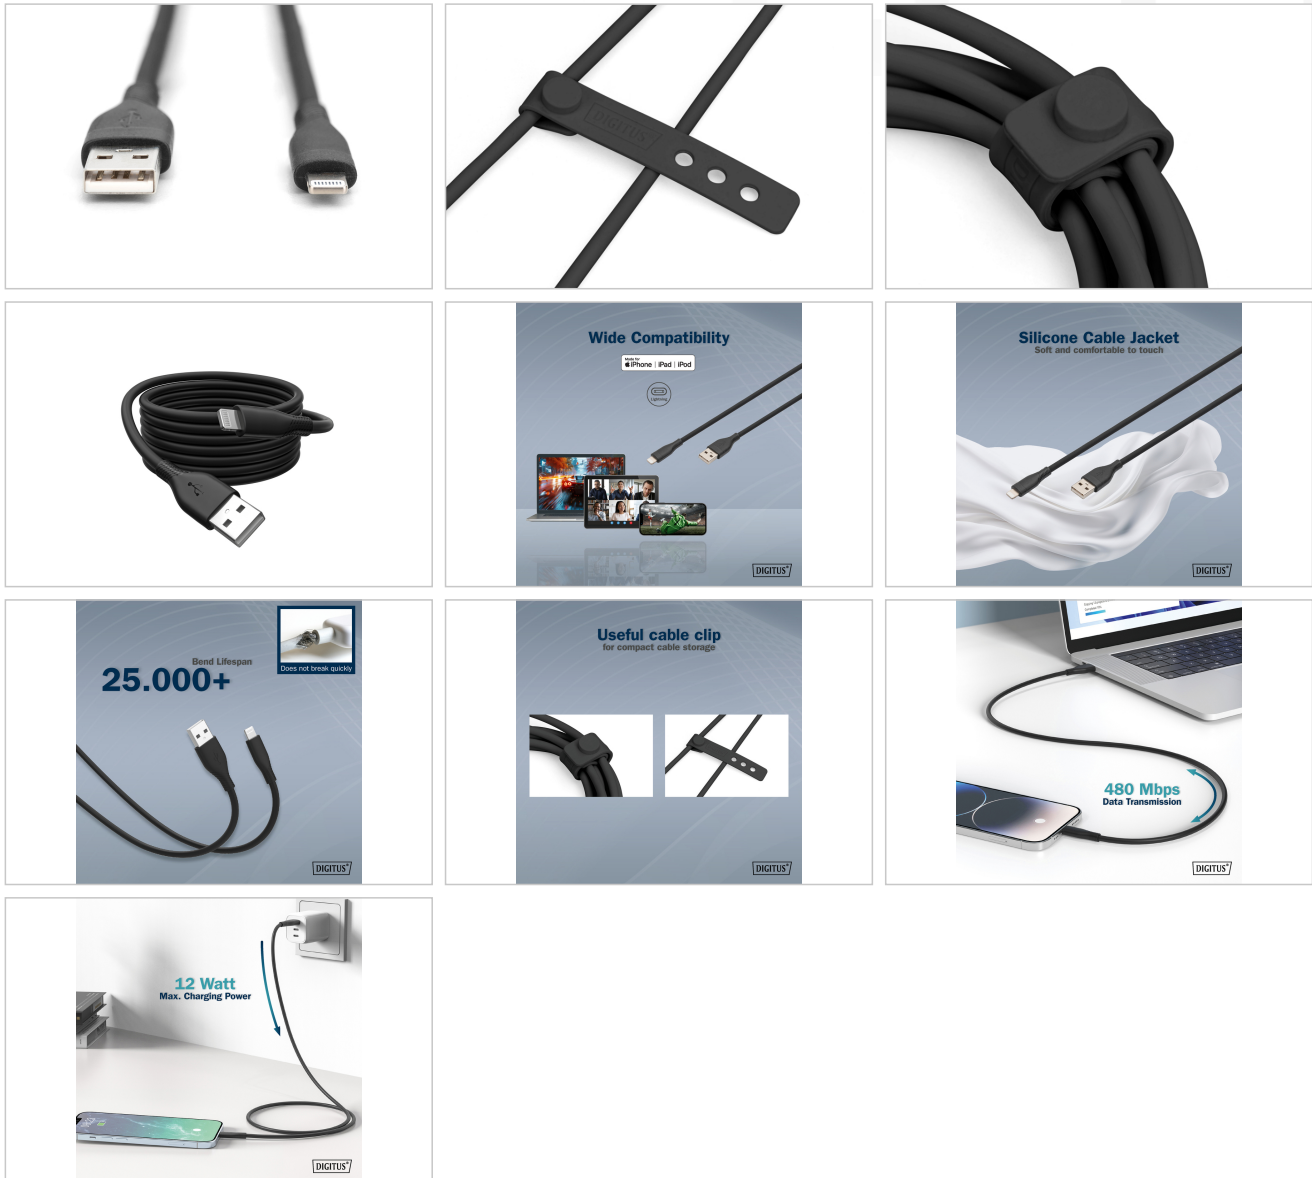

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com