


# DIGITUS® Modular plug for round cable, unshielded, 100 pcs.

DN-MO-8-8-SR

EAN 4016032499374

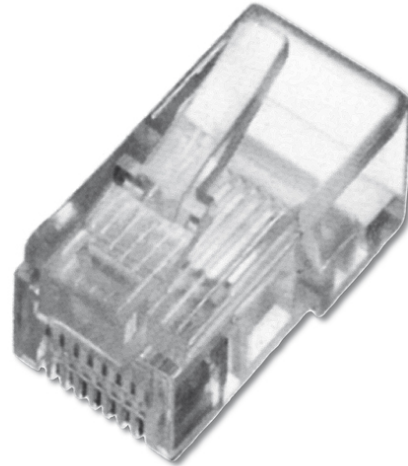

**Modular Plug, for stranded Round Cable, 8P8C unshielded, 100 pcs. packr**

The DIGITUS Modular connector for round cables with a two-part design is the ideal solution for precise and reliable assembly of network cables. Thanks to the two-part design, the wires can first be inserted into a separate guide, which ensures the correct sequence and significantly simplifies the installation process. This minimizes the risk of wiring errors and ensures a clean, professional finish. This unshielded CAT 5 connector is specially designed for use with round cables and ensures a stable connection with high reliability for typical network environments. It is therefore not only suitable for use in private environments, but also meets the requirements of many professional installations. The DIGITUS Modular connector combines easy handling with durable quality and represents an efficient and secure solution for modern cabling tasks.

**Modular plug, 8P8C, unshielded for solid conductor round cable two-piece plug**

- Performance characteristics: CAT 5e, 10/100Base-T, 1GBase-T

- Areas of application: Patch cable assembly
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL-certified
- Technical features:
- Socket mating cycle: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material plug housing: polycarbonate, natural
- Plug contact: Phosphor bronze, nickel 0.6 μ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≈ 30 N
- Diameter copper conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

**Attributes**

- Category: CAT 5e

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	16.40	46.50	35.00	30.00	48,825.00
Packaging Unit Inside	1	16.40	0.00	0.00	0.00	0.00
Packaging Unit Single	1	16.40	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)