


# DIGITUS® CAT 5e F/UTP data cable - installation cable, 305 m, Eca

DK-1521-V-305

EAN 4016032241126

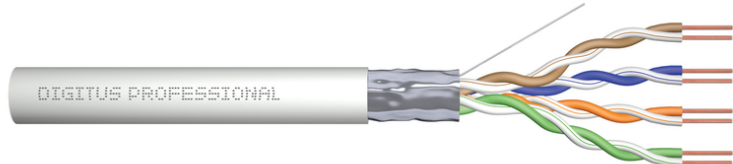

## CAT 5e F-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 305 m paper box, sx, grey

The Digitus® Cat.5e F/UTP installation cable is characterized by the following cable structure 4x2x AWG24/1 and achieves a transmission frequency of up to 100 MHz. The PVC cable sheath conforms to BauPVO Euroclass Eca. The cable is suitable for structured building cabling in secondary and tertiary areas. Conforms to the standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-2-1.

### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 24/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: PE (polyethylene)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: None
- Overall shielding: foil shield, twin wire
- Outer sheath: Eca according to EN 50575; PVC
- Outer sheath thickness (nominal): 0.55 mm nominal
- Outer casing color: Grey (RAL 7035)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Transport and storage temperature range: -20 °C to +75 °C
- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 6.1 mm nominal
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-100 MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-earth): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 147 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Phase delay: 535 nS/100 m max.
- Time delay: 20 nS/100 m max.
- Isolation class: "b" according to EN 50174-2
- NVP: 69%

### Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 5e
- Shielding: F-UTP, foil shielding
- CPR: Eca
- Length: 305 m
- Color: grey
- Jacket: PVC
- Structure: 4 x 2 AWG 24/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	2	27.00	43.00	43.00	25.00	46,225.00
Packaging Unit Inside	1	13.50	21.00	40.00	42.00	35,280.00
Packaging Unit Single	1	13.50	21.00	40.00	42.00	35,280.00
Net single without Packaging	1	12.56	21.00	40.00	42.00	35,280.00

