


# DIGITUS® USB-A - Micro-B connection cable, 1m

AK-300110-010-S  
 EAN 4016032285793

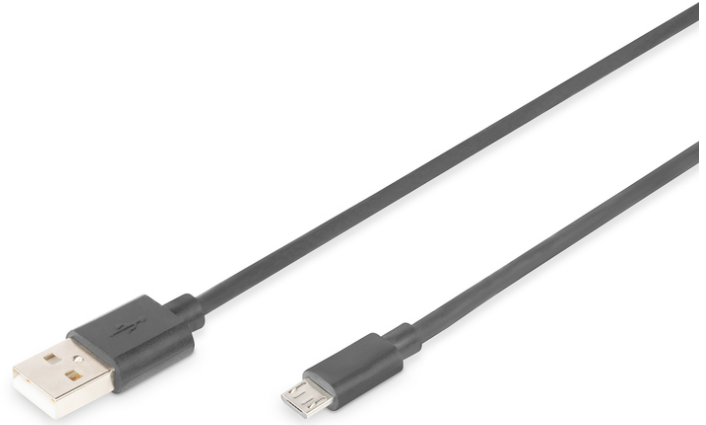

**USB 2.0 connection cable, type A - micro B M/M, 1.0m, USB 2.0 conform, bl**

For connecting external USB end devices (with Micro B socket, e.g. MP3 player, smartphone or external hard disk housing) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

**Enables reliable and fast connection of external USB devices to the PC.**

- Data transfer rate up to 480MB/s
- Power supply up to 5V/0.5A and 2.5W
- Copper cores, foil and braid shielded for robustness and a reliable connection



**Attributes**

- Assortment: USB Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Micro USB B, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 2.0
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	500	13.58	32.00	45.00	25.00	36,000.00
Packaging Unit Inside	10	0.27	24.00	21.00	3.00	1,512.00
Packaging Unit Single	1	0.03	0.80	9.20	19.60	144.26
Net single without Packaging	1	0.02	0.80	9.20	19.60	144.26

**More images:**

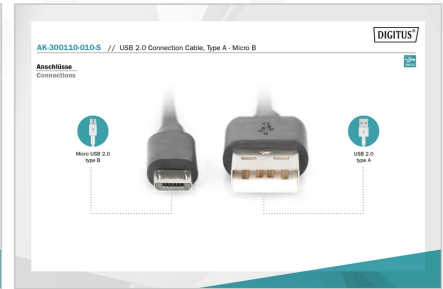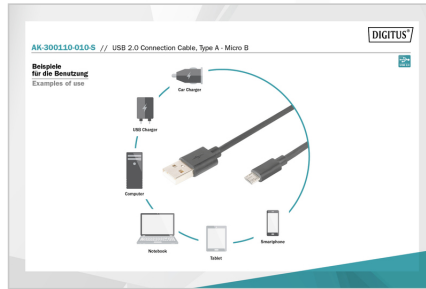

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)