

# DIGITUS® DisplayPort Connection Cable

AK-340102-020-W  
EAN 4016032289333



**DisplayPort Connection Cable, Type mini DP - DP M/M, 2.0m, w/interlock, Full HD, DP 1.1a conf., wh**

This high performance HD digital audio and video cable suits for connection of a MacBook, MacBook Air, MacBook Pro, iMac, Mac mini and Mac Pro to a Monitor, Beamer, LCD/TFT Monitor with DP interface, for example.

**Ideal to connect mobile devices with displays**

- Support 1080p with 30Hz
- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


**Attributes**

- Assortment: DisplayPort Cables

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	60	8.10	40.00	30.00	18.00	21,600.00
Packaging Unit Inside	10	1.35	35.00	43.00	1.50	2,257.50
Packaging Unit Single	1	0.14	25.00	14.00	3.00	1,050.00
Net single without Packaging	1	0.13	25.00	14.00	3.00	1,050.00

**More images:**

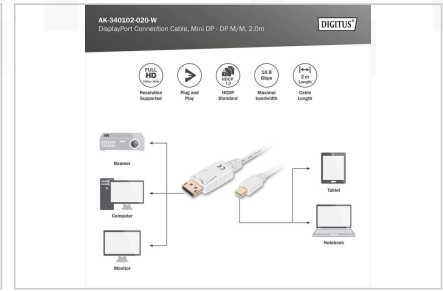

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)