

DIGITUS® DisplayPort Adapter / Converter, DP - HDMI

DB-340400-001-S
EAN 4016032292296



DisplayPort Adapter Cable, Type DP-HDMI A M/F, 0.15m,w/interlock, Full HD, DP 1.1a, bl

This HD video and digital audio adapter/converter is ideally suited for connecting a notebook or computer with DP interface to an HDMI monitor, projector, LCD/TFT monitor, LED or plasma TV using an HDMI cable. A secure hold is ensured by the integrated latch on the DP connection. Just plug in and get started with Plug and Play. The gold-plated contacts ensure optimal HD signal transmission and increase the service life of the plugs.

This HD video and digital audio adapter/converter is ideally suited for connecting notebooks or computers with DP interface to an HDMI monitor, projector, LCD/TFT monitor, LED or plasma TV using an HDMI cable.


- Supports up to 1080p with 60 Hz
- Support DP++ Dual-Mode
- Ensures a lower burden of the interface.
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes

- Assortment: DisplayPort Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Resolution max.: 1920 x 1080 Pixel, 60Hz
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	6.60	52.00	29.00	39.00	58,812.00
Packaging Unit Inside	20	1.65	27.00	25.00	17.00	11,475.00
Packaging Unit Single	1	0.08	26.50	7.50	2.30	457.13
Net single without Packaging	1	0.05	26.50	7.50	2.30	457.13

More images:

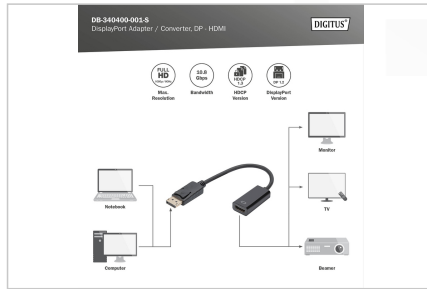

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com