

# DIGITUS® Modular Patch Panel, 24-port staggered

DN-91412

EAN 4016032295105



**Modular Patch Panel, shielded, 24-port blank, 1U, rack mount, staggered, bl RAL 9005**

The staggered modular 24-port Patch Panels from DIGITUS® are with the 1.5 mm cold rolled c-steel perfect suitable for 483 mm (19") rack mounting. Due to the staggered array of the keystone modules a better attenuation ratio is reached between surrounding transmission channels. They are available in the colors grey (RAL 7035) and black (RAL 9005).

- Layout Keystone Entry: Staggered
- Area of application: 483 mm (19") cabinet
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") cabinet mounting
- Suitable for shielded Digitus® Keystone Modules and Couplers
- Central ground connection


- Technical properties:
- Housing material: 1.5 mm SPCC cold rolled stell sheet, powder-coated
- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Grounding bar material: Galvanized steel
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Colour: Black RAL9005

**Attributes**

- Color: black, RAL 9005
- Ports: 24
- Units: 1

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	15	13.19	56.00	40.00	30.00	67,200.00
Packaging Unit Inside	1	0.88	5.00	54.00	15.00	4,050.00
Packaging Unit Single	1	0.88	5.00	54.00	15.00	4,050.00
Net single without Packaging	1	0.78	5.00	54.00	15.00	4,050.00

**More images:**

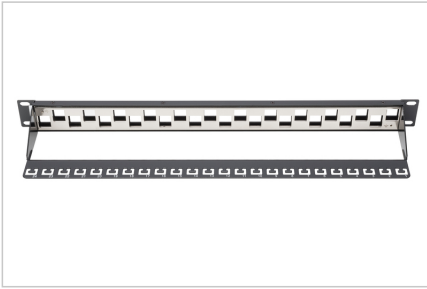

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)