

# USB 2.0 connection cable

AK-300105-030-E  
EAN 4016032297123



**USB 2.0 connection cable, type A - B M/M, 3.0m, USB 2.0 conform, be**

For connection of external USB devices (with B socket, e. g. external HDD enclosure, scanner or printer) to the USB Host (e. g. PC, Notebook or USB Hub). Datatransferrate up to 480 Mbps (High-Speed).

**Allows a reliable and fast connection of external USB devices with the PC, also about longer distances.**


**Attributes**

- Assortment: USB Cables
- AWG: 28

- Color cable: beige
- Color connector: beige
- Connector 1: USB A, plug
- Connector 2: USB B, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 2.0
- Wire material: CU
- Length: 3 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	14.00	32.00	45.00	25.00	36,000.00
Packaging Unit Inside	10	0.70	24.00	21.00	8.00	4,032.00
Packaging Unit Single	1	0.07	14.00	25.00	1.10	385.00
Net single without Packaging	1	0.07	14.00	25.00	1.10	385.00

**More images:**

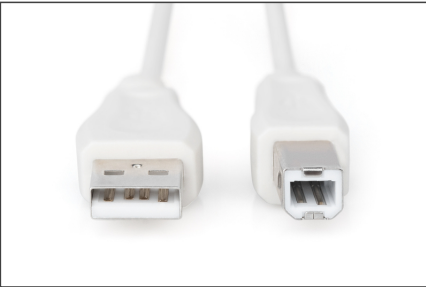



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.