


2-Port Serial PCI Card

DS-33003
EAN 4016032309369

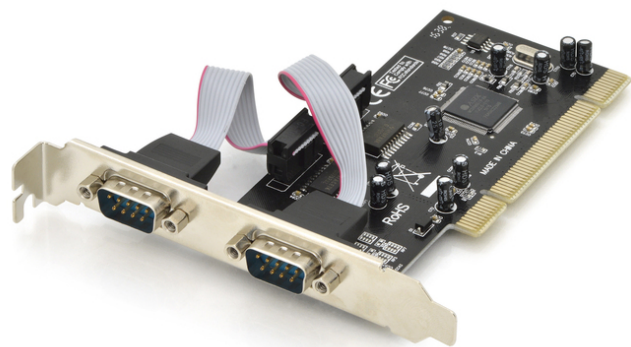

Serial I/O RS232 PCI Add-On Card 2-port, chipset: MCS9865

This PCI based serial Add-On card allows you to turn a PCI slot into two RS232 (DB9) serial ports. Based on a native single chip design reduces the load applied to the CPU by as much as 48% over conventional serial cards.

Perfect for connecting serial modems, PDAs, digital cameras, printers, ISDN terminal adapters and many more

- Compliant with PCI Local Bus specifications, Revision 2.3, 32-bit bus
- Supports 2x UART serial ports
- Easy plug and play
- Built-in 16C450/550 compatible UART


- On chip 256 byte FIFOs in transmit and receive path of each serial port
- Serial data transfer rate up to 115,200bps
- Connectors 2x DB9 male serial connectors
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 10, 8.1, 8, 7, Vista, XP and Linux

Package contents

- 2-Port Serial PCI Card
- Driver CD
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	6.50	40.00	40.00	37.00	59,200.00
Packaging Unit Inside	1	0.16	12.00	12.60	1.90	287.28
Packaging Unit Single	1	0.16	12.00	12.60	1.90	287.28
Net single without Packaging	1	0.13	12.00	12.60	1.90	287.28

More images:

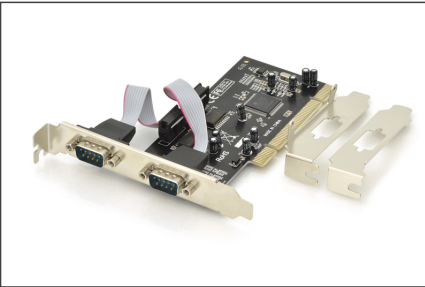

Safety notes

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.

-
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
 - Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
 - Avoid using too much force when connecting the product to the PC.
 - Please ensure that any cables are connected correctly without overstretching or damaging them.
 - Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.