


# DIGITUS®

DK-1512-0025/B

EAN 4016032317487

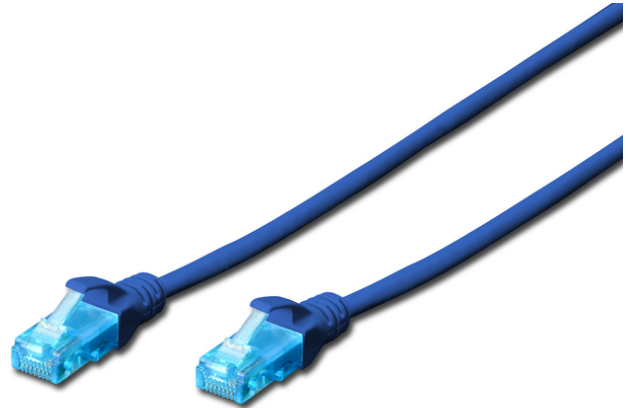

**CAT 5e U-UTP patch cable, PVC AWG 26/7, length 0.25 m, blue**

#### Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Category: CAT 5e
- Shielding: U-UTP, unshielded

- Length: 0.25 m
- Color: blue
- Jacket: PVC
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

#### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
<b>Packaging Unit Carton</b>	300	5.30	36.00	30.00	23.00	24,840.00
<b>Packaging Unit Inside</b>	10	0.18	22.00	20.00	4.00	1,760.00
<b>Packaging Unit Single</b>	1	0.02	20.00	11.00	1.00	220.00
<b>Net single without Packaging</b>	1	0.01	20.00	11.00	1.00	220.00

#### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>

[info@assmann.com](mailto:info@assmann.com)