

# DIGITUS® HDMI High Speed with Ethernet Connection Cable

AK-330114-050-S  
EAN 4016032322993



## HDMI High Speed Connection Cable, Type A, w/Ethern M/M, 5.0m, Ultra HD, 4K@30Hz, gold, bl

This 4K Ultra HD and 3D suitable cable used for connection of audio/video devices, such as Blu-ray player, game pads or consoles, etc., for example, with a TV, monitor or computer. Also capable for use of any IP-based application.

### Supports 4K Ultra HD and 3D

- Support 4K Ultra HD with 30Hz
- HDMI 1.4
- 8.16 Gbps


### Attributes

- Assortment: HDMI Cables

- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Resolution max.: 3840 x 2160 Pixel, 30Hz
- Length: 5 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 60           | 17.40       | 45.00      | 40.00      | 23.00       | 41,400.00       |
| Packaging Unit Inside        | 5            | 1.45        | 43.00      | 45.00      | 4.00        | 7,740.00        |
| Packaging Unit Single        | 1            | 0.29        | 27.00      | 23.00      | 4.00        | 2,484.00        |
| Net single without Packaging | 1            | 0.28        | 27.00      | 23.00      | 4.00        | 2,484.00        |

**More images:**

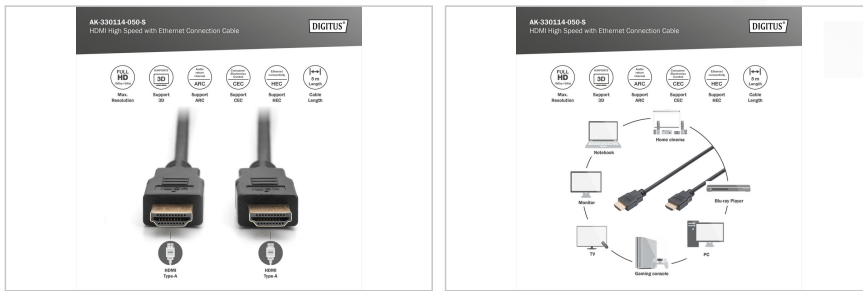

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)