

# DIGITUS® Mini DisplayPort - HDMI Adapter / Converter

AK-340411-001-W  
 EAN 4016032328599



**DisplayPort Adapter Cable, Type mini DP - HDMI A M/F, 0.15m, DP 1.1a, wh**

This digital HD video and audio adapter / converter suits for example ideal to connect a MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac Mini® and Mac Pro® to a HDMI Monitor, beamer, LCD/TFT monitor, LED or plasma TV with a HDMI cable.

**Ensures a lower burden of the interface.**

- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


**Attributes**

- Assortment: DisplayPort Cables

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Resolution max.: 1920 x 1080 Pixel, 60Hz
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	8.60	50.00	33.00	22.00	36,300.00
Packaging Unit Inside	10	0.43	1.00	16.00	24.00	384.00
Packaging Unit Single	1	0.04	1.00	16.00	24.00	384.00
Net single without Packaging	1	0.04	1.00	16.00	24.00	384.00

**More images:**

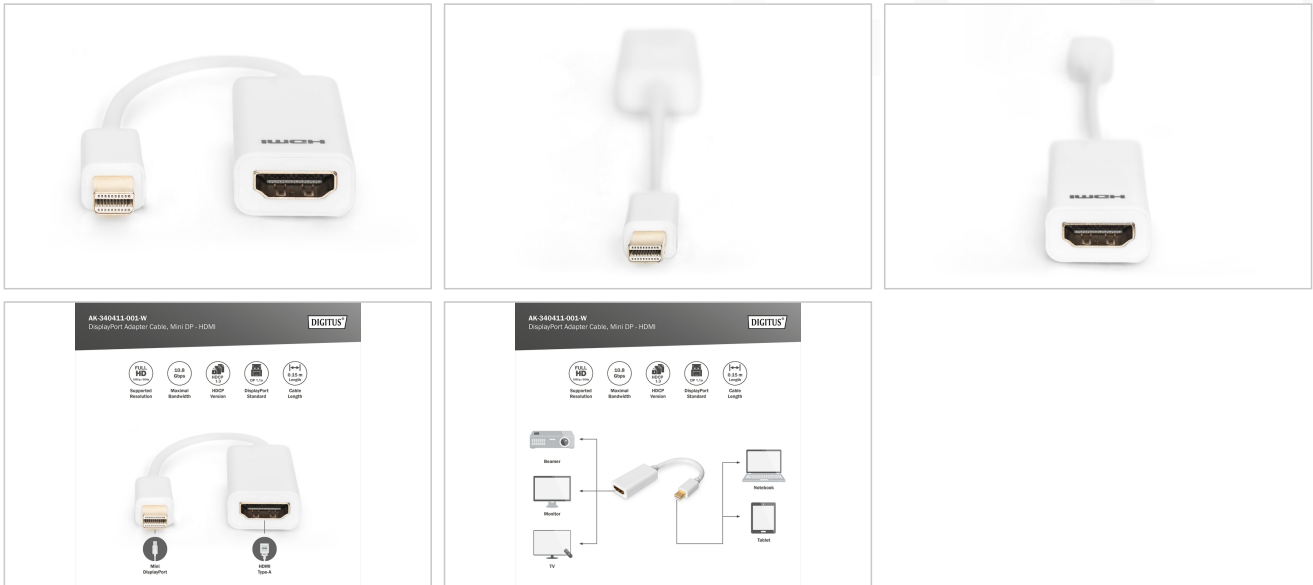

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)