

# DIGITUS® CAT 6A Field Termination Coupler, 500 MHz

DN-93909

EAN 4016032431268



**Field Termination Coupler CAT 6A, 500 MHz for AWG 22-26, fully shielded, keyst. design, 26x35x80**

The DIGITUS Professional Field Termination Coupler is used for connecting or extending of twisted pair cables.

- Transmission properties: Category 6A, Class EA
- Area of application: Up to 500 MHz, 10GBase-T
- Suitable for cables with AWG 22-26 diameter
- Shell: Zinc alloy



- Contacts: Nickel-plated
- shielded
- Keystone Design
- 1 to 1
- Operating temperature: -10 °C to +60 °C


**Attributes**

- Category: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	300	12.70	31.30	23.40	53.50	39,184.50
Packaging Unit Inside	30	1.27	8.00	3.50	2.60	72.80
Packaging Unit Single	1	0.04	9.00	8.00	3.00	216.00
Net single without Packaging	1	0.04	9.00	8.00	3.00	216.00

**More images:**

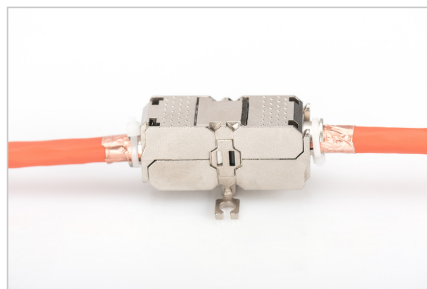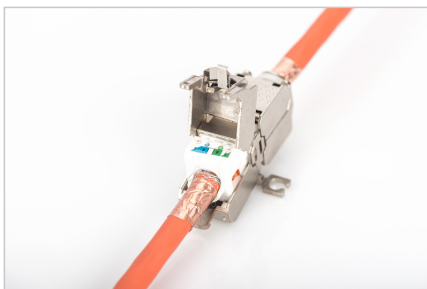

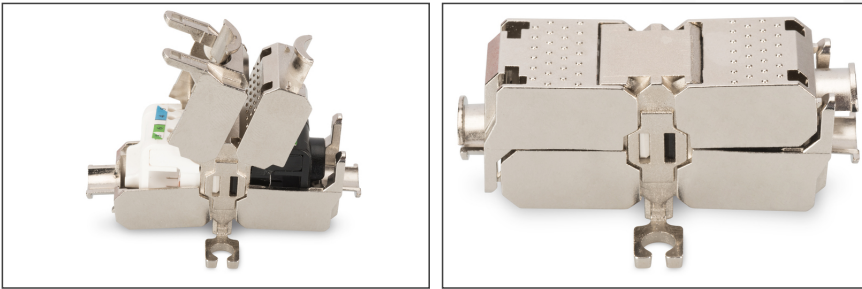

#### Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)