

DIGITUS® Roof Cooling Unit for Industrial Free Standing Cabinets

DN-19-FAN-4-I-8-10

EAN 4016032442936



Roof cooling unit for IP55 Indoor Network Cabinets 800x1000mm, roof constr., 4 fans, filter, grey

The roof fan units are suitable for all free-standing industrial cabinets from DIGITUS®. Apart from the fans, the scope of delivery also includes all the necessary sheets for replacement in the ceiling structure of your cabinet as well as dust filter inserts. A switch and adjustable thermostat ensure optimal options for adjustment.

- 4 fans
- Noise level: 47 dBm
- incl. thermostat, adjustable from 0 °C up to +70 °C
- On/off switch
- Air flow: 9.2 m³/min. (552 m³/h)
- 1.8 m cable with safety plug CEE 7/7 (Type-F)

Attributes


- Color: light grey, RAL 7035
- Air flow: 552 m³/min
- Filter: yes
- For cabinet series: Free standing industrial cabinets
- Inch form factor (IEC 60297): 482.6 mm (19")
- Mounting area: Roof
- Quantity of mounted fans: 4

Package contents

- Roof Cooling Unit
- Roof cover with filters for network cabinet
- Fixing material

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 1 | 20.13 | 100.60 | 80.60 | 15.00 | 121,625.00 |
| Packaging Unit Inside | 1 | 20.13 | 100.60 | 80.60 | 15.00 | 121,625.00 |
| Packaging Unit Single | 1 | 20.13 | 100.60 | 80.60 | 15.00 | 121,625.00 |
| Net single without Packaging | 1 | 18.13 | 100.60 | 80.60 | 15.00 | 121,625.00 |

More images:

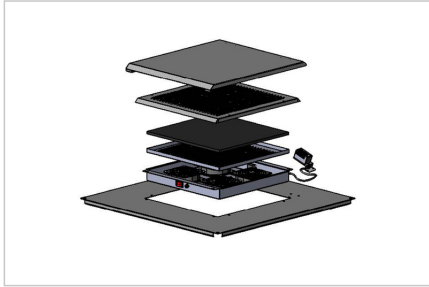

Safety notes

- When installing and using the accessory product for network cabinets, observe the respective safety instructions of the manufacturer or the cabinet system in which you want to use the accessory.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com