

# DIGITUS® Active USB 3.0 extension cable, 10 m

DA-73105

EAN 4016032457480



### USB 3.0 Active Extension Cable length: 10 m

Connect even distant USB 3.0 devices with this active extension cable. Benefit from stable connections and avoid power loss even over longer distances thanks to the integrated signal amplifier. The integrated LED function indicator signals the status of the signal amplifier. Connect your USB 3.0 devices such as printers or scanners to your PC or notebook, even over longer distances. The integrated electronics ensure smooth data transmission at all times without any losses. With the active USB 3.0 extension cable series, DIGITUS® offers solutions from 10 to 20 m in length. No more connection problems with longer USB cable connections!

### Use even distant USB devices with this active USB 3.0 extension cable with signal amplifier

- Cable length: 10 m
- Extends the maximum permissible USB cable length by 10 m
- Connection 1: USB A plug
- Connection 2: USB A socket
- Data transfer rates: up to 5 Gbps (USB 3.0, Super Speed)
- Complies with the USB 3.0 specification, downwards compatible with USB 2.0 / 1.1


- Supports USB Low Speed (1.5 Mbps), Full Speed (12 Mbps), High Speed (480 Mbps) and Super Speed (5 Gbps)
- Plug & Play with HotSwap support
- Chipset: GL3521, PM25LD512
- AWG: 28/28/24
- Support Windows 10/8/7/Vista/XP/2003/2000, macOS X, Linux
- Shielding: Triple
- The connected device may be connected to the repeater cable with a maximum additional length of 1.2 m.
- Recommended wattage of the power supply unit: 10W (5V/2A)
- Weight: 400 g
- Color: Black
- Includes DC cable (USB 2.0, USB-A - DC) for connecting to a power supply unit

### Package contents

- 1 x Active USB 3.0 extension cable 10 m
- 1 x DC cable (USB 2.0, USB-A - DC) for connecting to a power supply unit
- 1 x manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	24	13.54	21.30	50.40	42.00	45,087.80
Packaging Unit Inside	1	0.56	16.50	16.50	5.00	1,361.25
Packaging Unit Single	1	0.56	16.50	16.50	5.00	1,361.25
Net single without Packaging	1	0.47	16.50	16.50	5.00	1,361.25

## More images:

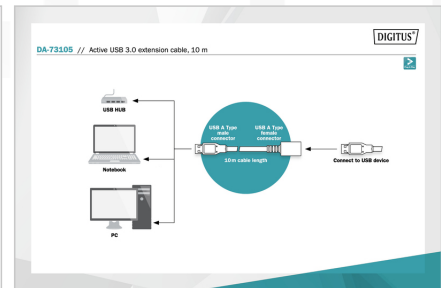

## Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)