

# DIGITUS® 3-in-1 USB charging cable, 0.15m

DB-300160-002-S  
EAN 4016032466208



### USB charger cable, 0.15m 3-in-1 cable, nylon braid, black

The DIGITUS® 3-in-1 charging cable is ideal for charging your portable devices on a power supply unit, PC or other device with a USB-A connection. Use one cable to charge all your devices. The compact dimensions make the cable the ideal companion for home, office or when traveling.

### 3-in-1 multi-charging cable for connecting devices with USB-C, micro USB or 8-pin connection to a USB-A connection

- Supported charging power: 10 W (5 V / 2 A)
- Operating temperature: -10 ~ 50°C
- Operating humidity: 0 - 75%
- Connection 1: USB-A, plug


- Connection 2: Apple, plug / Micro-USB, plug / USB-C, plug

### Attributes

- AWG: 30
- Color cable: black
- Connector 1: USB A, plug
- Connector surface: nickel-plated
- Hoods: Metallic housing
- Wire material: CU
- Length: 0.15 m
- Shielding: Unshielded
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	40	7.50	29.00	55.00	20.00	31,900.00
Packaging Unit Inside	10	1.88	26.50	27.50	9.00	6,558.75
Packaging Unit Single	1	0.19	5.50	23.50	2.00	258.50
Net single without Packaging	1	0.18	5.50	23.50	2.00	258.50

**More images:**

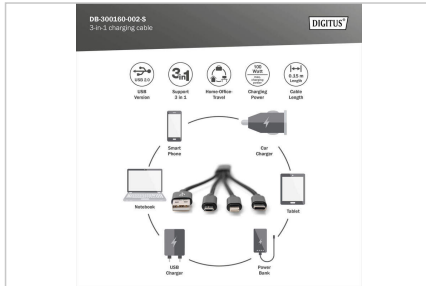

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)