

DIGITUS Universal Charging Adapter, USB-C™, 20 W

DA-10196
EAN 4016032474036



USB-C Wall Charger 20W, PD 3.0, white

The Universal Charging Adapter from DIGITUS® is suitable for USB-C™ devices such as smartphones, tablets or notebooks and provides an output of up to 20 W. The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices. The LED display provides information about the current charging status. Its compact dimensions make the charging adapter ideal for on the go.

High-performance charging adapter with an output of up to 20 W for USB-C™ devices of all kinds with numerous safety features

- Connection: USB Type-C™
- Compatible with smartphones with 20 W charging adapted, e.g. from Apple, Huawei, XIAOMI, Google, Samsung
- Input voltage: 100 - 240 V AC, 50/60 Hz
- Plug designation: CEE-7/16 Euro plug (Type C)
- Standby power consumption: 0.1 W
- Output voltage: 5 V / 3 A, 9 V / 2.22 A (20 W max.)
- Supports Power Delivery 3.0 with 20 W charging capacity

- Surge protection / excess current protection / overload protection / short circuit protection
- Protection against overheating with automatic switch-off and recovery (auto-recovery)
- Operating temperature: 0 °C to 40 °C
- Storage temperature: -20 °C to +85 °C
- Operating humidity: 20% - 90% RH (non-condensing)
- Storage humidity: 5% - 95% RH (non-condensing)
- Housing: Fire-resistant material
- Dimensions: L 64.1 x W 44 x H 27.7 mm
- Color: White
- Weight: 59 g

Attributes


- Style: Charger/Power supply
- USB-C Products: yes

Package contents

- 1 x Universal Charging Adapter, USB-C™, 20 W
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	8.50	37.00	67.00	19.00	47,101.00
Packaging Unit Inside	1	0.09	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.09	8.00	13.00	3.50	364.00
Net single without Packaging	1	0.06	8.00	13.00	3.50	364.00

More images:

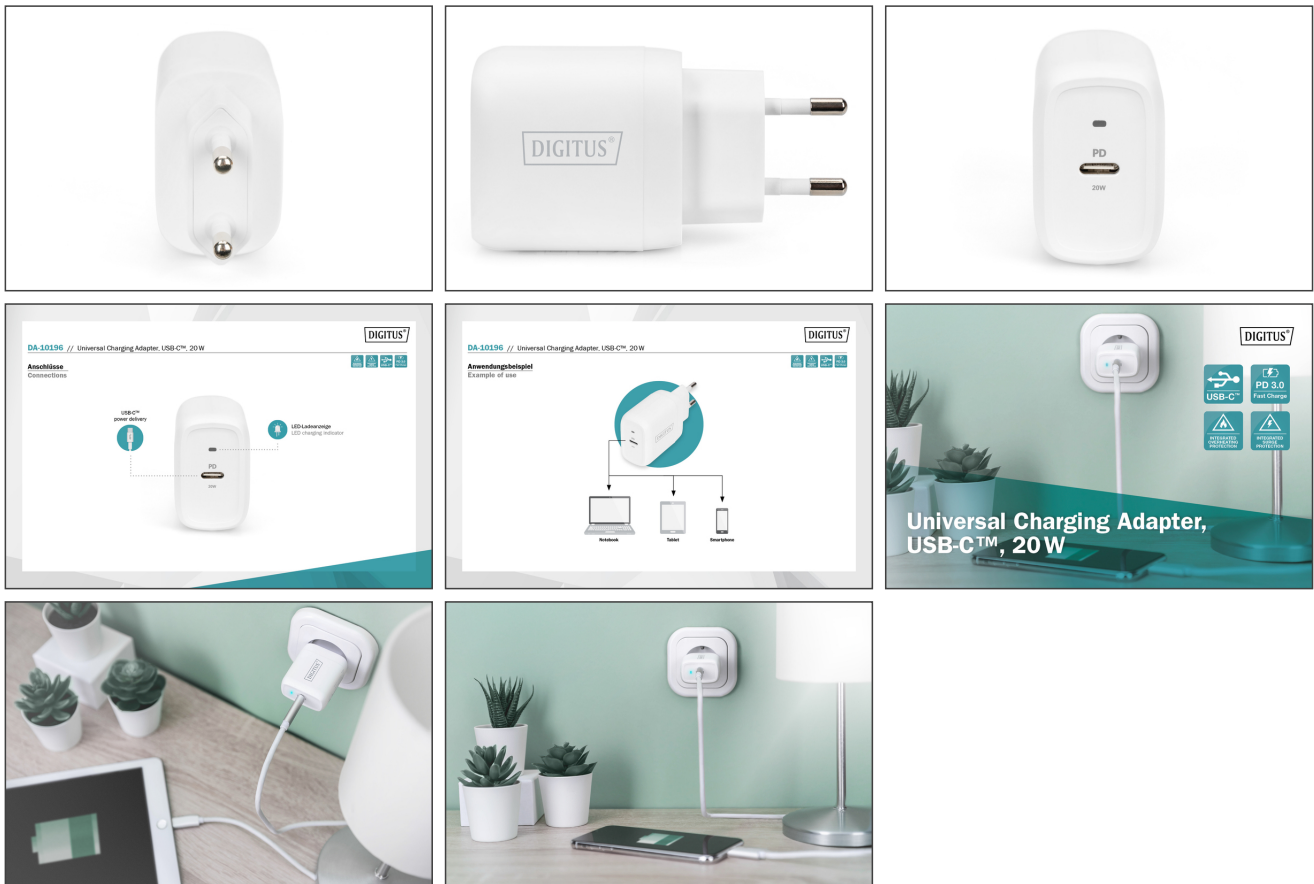

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com