

# DIGITUS® USB-C - USB-C extension cable, 1m

DB-300230-010-S

EAN 4016032481188



### USB 3.2 Gen1 Extension Cable, 1m, 4K@60Hz, bl Aluminum, PD60W

The Digitus® USB 3.0 Gen.1 extension cable is the all-rounder among cables. Thanks to the Thunderbolt 3 protocol, PCI Express, DisplayPort and host-to-host transmissions can be realized. You can use this cable to transfer audio/video signals, data and power. The data transfer speed is 5 Gbit/s. This allows you to transfer large data such as movies and music within seconds. The video signals are transmitted in max. 4K at a refresh rate of 60 Hz. Thanks to USB Power Delivery, the charging function is guaranteed. With the corresponding charger, you can charge your smart devices with max. 60 W (3 A / 20 V) in a short time. The USB Type-C interface enables broad compatibility with devices with this connection.

#### Supports the following transmission types audio/video/data transmission/charging function

- Supports: 4K @ 60Hz
- Supports data transfer rates of up to 5 Gbit/s
- Backwards compatible with Thunderbolt 3 and USB 2.0
- Supports USB Power Delivery with 20V, 3A and 60W
- Core material: CU
- OD: 4.3 mm
- Material: TPE
- Operating temperature: -20°C - 60°C
- Storage temperature: -10°C - 50°C

- Humidity: 95%
- Bending radius: 60
- Tensile strength: 4Kg/min
- Manufacturer's instructions:
- If you connect a USB-C monitor/TV/projector to a PC equipped with USB Type-C, please make sure that your USB-C display supports DisplayPort signal output.
- The video output capability depends on the graphics card of your notebook and the connected monitor. Some monitors also limit the available resolution.

#### Attributes


- AWG: 32
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB-C jack
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 3.0 / 3.1
- Length: 1 m
- Shielding: Double shielding

#### Package contents

- 1x USB 3.0 Gen.1, USB Type -C extension cable; M/F (1m)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	5.40	34.00	37.00	31.00	38,998.00
Packaging Unit Inside	20	0.90	36.00	24.00	7.00	6,048.00
Packaging Unit Single	1	0.05	11.00	12.00	3.00	396.00
Net single without Packaging	1	0.03	11.00	12.00	3.00	396.00

**More images:**

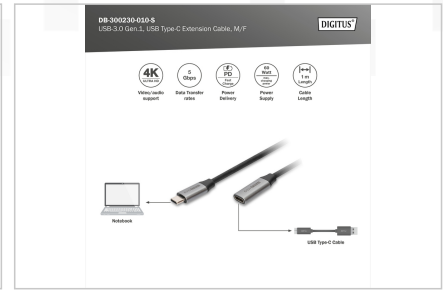

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)