

Audio Connection Cable, 3.5 mm jack to 3.5 mm jack

DB-510110-018-S
EAN 4016032481270



AUX Audio Cable Stereo 3.5mm Male to Male Aluminum Housing, Gold plated, NYLON Jacket, 1,8m

The Aux/Jack Cable with 3.5 millimeter jack plugs (plug to plug) transfers audio signals in brilliant quality to headphones, headsets or speakers – from smartphones, PCs, MP3 players, car radios and other devices with 3.5 mm Aux connection. The gold-plated contacts deliver the highest transmission quality and perfect audio transmission.

Gold-plated plug for long-lasting and undisturbed sound

- 3.5 stereo jack plug <=> 3.5 mm jack plug



- Optimally suited for iPhones, iPads, smartphones, car radio, loudspeaker, TV, PC, etc.
- Nylon mesh, protects the cable from knotting

Attributes

- AWG: 28
- Color cable: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 3.5mm stereo plug
- Connector surface: gold-plated
- Length: 1.8 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	120	4.32	36.00	39.00	32.00	44,928.00
Packaging Unit Inside	20	0.72	36.00	24.00	6.50	5,616.00
Packaging Unit Single	1	0.04	23.00	5.50	2.00	253.00
Net single without Packaging	1	0.03	23.00	5.50	2.00	253.00

More images:

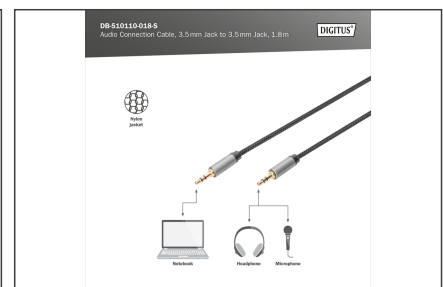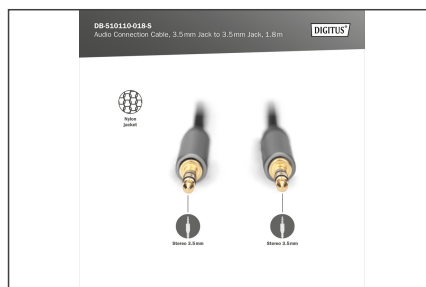



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.