

# DIGITUS® Socket strip with aluminum profile, 10-way, 2 m supply cable, IEC C20 plug

DN-95427

EAN 4016032483533



## 1U Aluminum PDU, rackmountable, 8 x C13, 2 x C19 16A, 230VAC, 50/60Hz, IEC C20 plug

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology and laboratories. With its IEC60320 C13 and C19 input plugs, the PDU is ideal for use as an additional 19" distribution board for a UPS. The individual C13 and C19 outlets are equipped with pull-out protection.

### Safe and professional power supply in the 19" range

- Pull-out protection on each output (for C13 and C19 standard cables)
- Horizontal 19" installation in the rack
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: Plug IEC60320 C20, 230 Vac / 16 A
- Output: appliance sockets 8 x IEC60320 C13, 2 x IEC60320 C19, integrated pull-out protection for each output

- Rated voltage: 230–250 VAC, 50/60 Hz
- Supply cable: cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m
- Dimensions: 482.6 (19") x 45 (1U) x 60 mm (HxWxD)

### Attributes







- Current: 16 A
- Input Plug: IEC 60320 C20 inlet
- Installation: Rack 1U
- Outlets: IEC 60320 C13, IEC 60320 C19
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

### Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	10.00	29.50	19.50	52.00	29,913.00
Packaging Unit Inside	1	1.00	5.80	9.70	51.00	2,869.26
Packaging Unit Single	1	1.00	5.80	9.70	51.00	2,869.26
Net single without Packaging	1	0.95	5.80	9.70	51.00	2,869.26

**More images:**

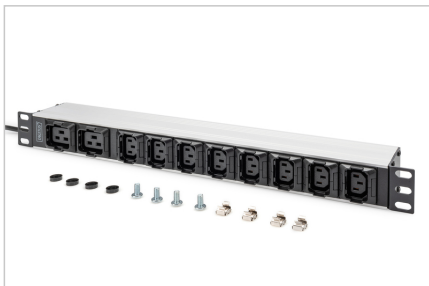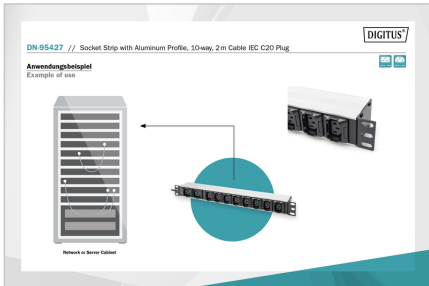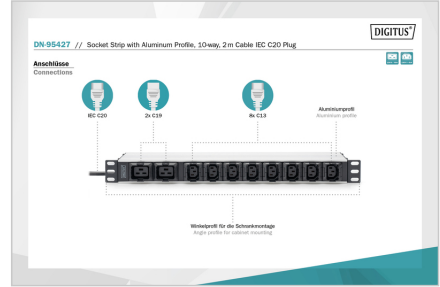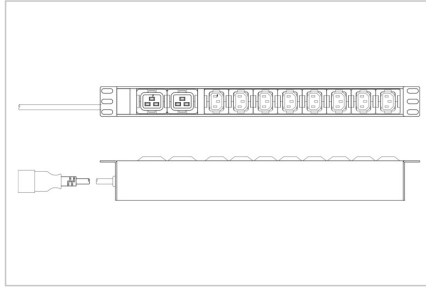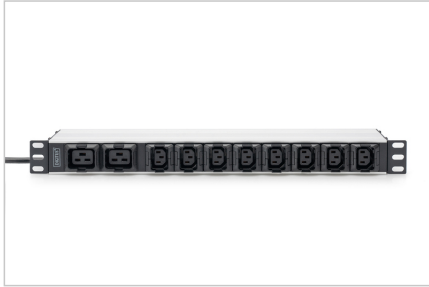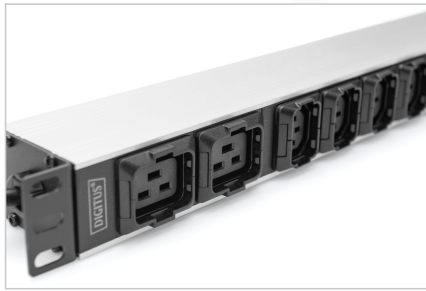

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)