

DK-35121-U/4-VI
EAN 4016032485391



FO 50/125μ, MM OM4, 12 fibers, Universal, Unitube, LSZH, Dca, Violet Erika color, 4KM


Attributes

- Application: universal
- Cable jacket: LSOH

- Cable type: U-DQ (ZN) BH X G 50/125μm
- Color cable: erika violet
- Fiber class: OM4
- Fiber diameter: 50/125μ
- Mode: Multimode
- Number of fibers: 12

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

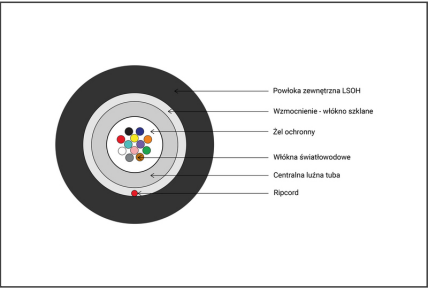

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.

-
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
 - Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
 - Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
 - Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.