


# DIGITUS® 16K DisplayPort Connection Cable, Version 2.1, 1m, 80G, black

DB-340111-010-S

EAN 4016032491187

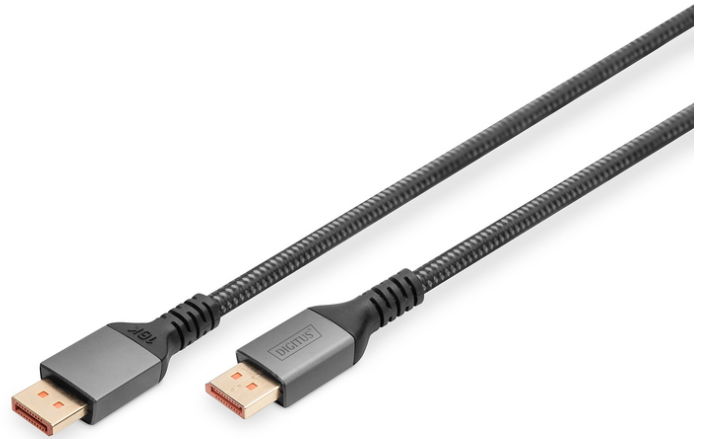

### Premium DisplayPort Connection Cable, Type DP M/M, 1.0m, Alu Housing, UHD 16K, DP 2.1, bl

With the cable standard 2.1, the DisplayPort cable supports the latest technology and all current requirements – from the transmission of high-resolution UHD 16K content to the support of HDCP and DPCP encryption. HDCP version 2.2 ensures secure transmission of content and protects your media against unauthorized access. Mirror your notebook desktop onto a large monitor or expand your desktop with an additional display using DisplayPort. High-speed data transfer of up to 80 Gbps is possible with this high-quality cable, no judder even during the most demanding graphics applications or games. Not only does this cable support impressive resolutions such as 16K @ 60 Hz, 8K @ 120 Hz, it also enables additional formats including 4K @240 Hz, 2K @ 240 Hz. Versatility is the key here, which makes it ideal for a variety of devices and display configurations. Gold-plated contacts and double shielding of the cable ensure maximum conductivity and interference-free transmission.

### Supported video formats: 16K @ 60 Hz, 8K @ 120 Hz, 4K @240 Hz, 2K @ 240 Hz

- Signal transmission rate up to 80Gbps
- Screen resolution up to 16K/60Hz


- Supported resolutions: 16K @ 60 Hz, 8K @ 120 Hz, 4K @240 Hz, 2K @ 240 Hz
- Supports Dynamic HDR 4:4:4 / HDR 10 and 3D
- HDCP version: 2.2
- AWG: 30
- Downwards compatible with DP standards 2.0, 1.4, 1.3 and 1.2
- UHBR20

### Attributes

- AWG: 30
- Color cable: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 2.1
- Ferrite filter: none
- HDTV Standard: Ultra HD 8K
- Hoods: Aluminum
- Interlock: none
- Length: 1 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	6.50	42.00	26.00	42.00	45,864.00
Packaging Unit Inside	10	1.63	10.00	24.00	40.00	9,600.00
Packaging Unit Single	1	0.16	2.00	15.00	15.00	450.00
Net single without Packaging	1	0.14	2.00	15.00	15.00	450.00

More images:

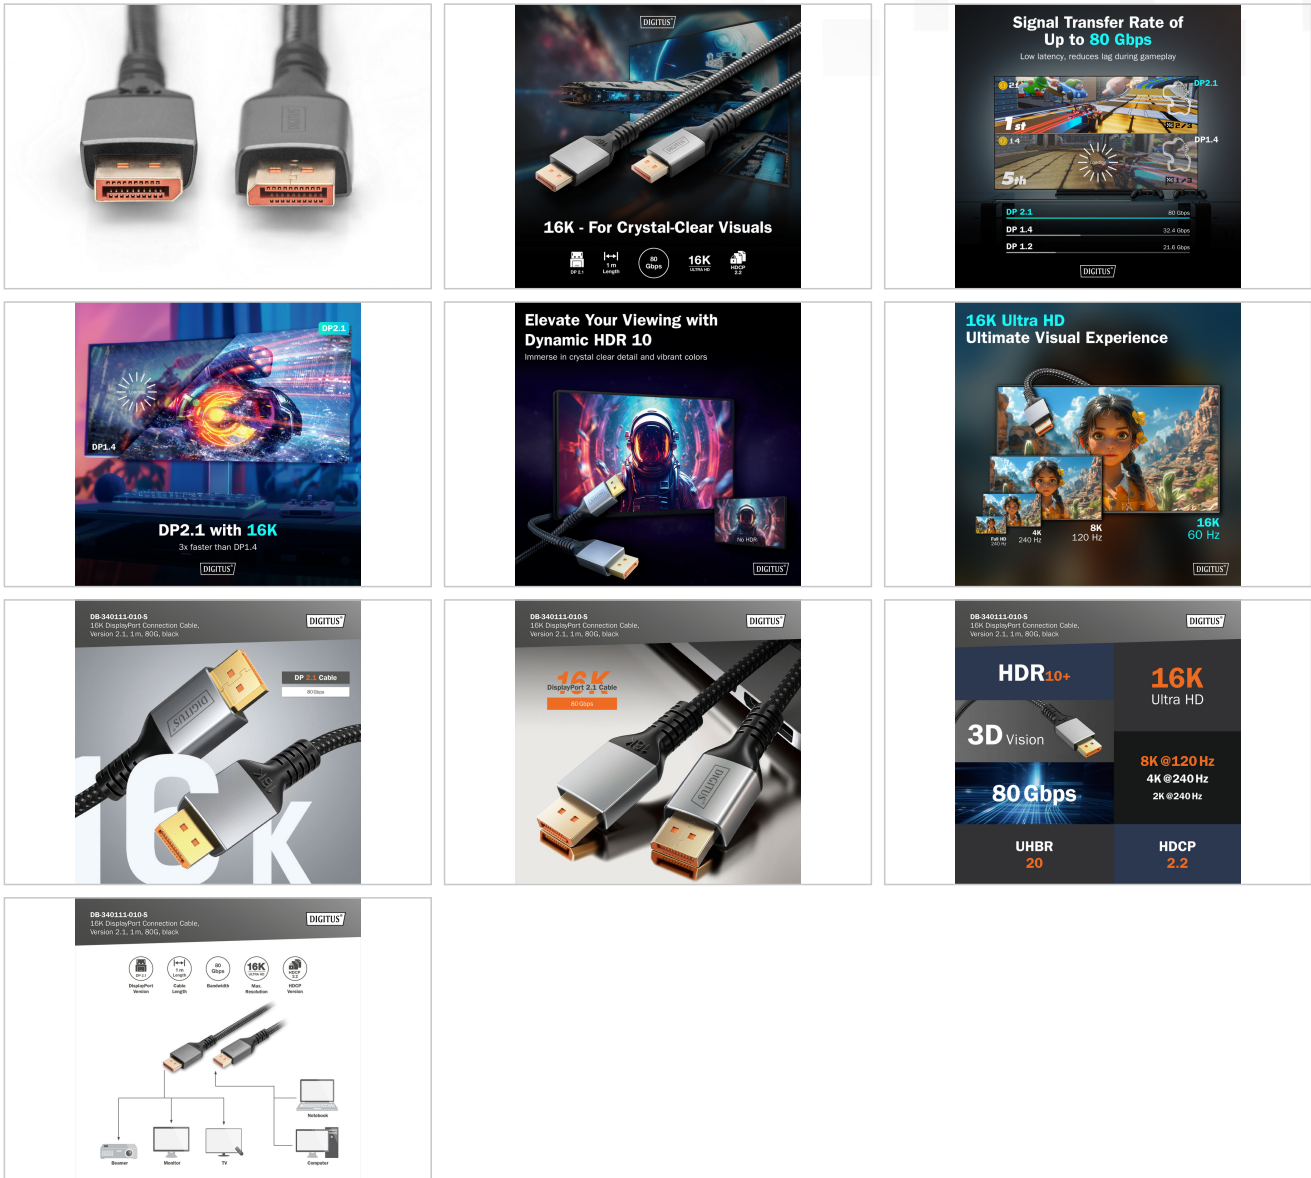

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)