

# DIGITUS® LED light, 6W

DN-19-LIGHT-6

EAN 4016032510765



## LED lighting with IR sensors, 6W, 610 mm including power adapter, with magnetic strip

Thanks to its compact design and magnetic mounting, the LED light is highly versatile. It can be installed anywhere in your 482.6 mm (19") enclosure, where it provides optimal lighting via high-performance LEDs that deliver maximum brightness immediately, without a warm-up period. The two different modes (selectable via a switch) offer particularly user-friendly operation. Automatic mode ensures that the LED cabinet lighting turns on automatically via the sensor as soon as you open the door of your 482.6 mm (19") enclosure, and turns off again as soon as you close it. Alternatively, the ON/OFF mode can be used for manual switching. Move your finger or hand in front of the sensor to turn the light on and off. The power adapter is included, so the DIGITUS® LED light is ready to use right out of the box.

**The perfect light source for your enclosure. Can be installed horizontally or vertically. Thanks to its magnetic mounting, it's versatile and can be used in a variety of applications, not just in network or server cabinets.**

- Nominal input voltage: 100–240 V
- Input frequency: 50/60 Hz
- Operating voltage: 12 V DC, 1000 mA
- Power: 6 W
- Control: IR sensor
- Detection range of the infrared sensor: 4–5 cm

- Power Adapter Plug: CEE 7/16 (Type C) Euro Plug
- LED DC input connector: 3.5 mm; 1.5 m long
- Maximum total current consumption: 250 mA @ 220–240 V
- Luminous flux: 510 lm
- Light source: 6500K LED
- Time to reach 60% of maximum brightness: <1 sec.
- Consumption in kWh/1,000 h: 0.003 kWh
- Service life in hours: 20,000
- Increase (above MSL) in operating altitude: 0–3,000 m / 0–15,000 m
- Storage/operating temperature: -25 °C to +65 °C / -20 °C to +45 °C
- Operating storage humidity: 0–95% RH, non-condensing 0–95% RH, non-condensing
- Aluminum housing
- Color: black plastic & gray aluminum
- CE & ROHS compliant

### Attributes

- Units: 1
- Inch form factor (IEC 60297): 482.6 mm (19")




### Package contents

- 1 LED light
- 1 x Power Adapter
- 2 magnetic strips
- 1 x set of screws

## Logistics

|                                 | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³       |
|---------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
| Packaging Unit Carton           | 20              | 7.90           | 24.00         | 32.50         | 64.00          | 49,920.00 |
| Packaging Unit Inside           | 1               | 0.40           | 4.50          | 64.00         | 8.00           | 2,304.00  |
| Packaging Unit Single           | 1               | 0.40           | 4.50          | 64.00         | 8.00           | 2,304.00  |
| Net single without<br>Packaging | 1               | 0.28           | 4.50          | 64.00         | 8.00           | 2,304.00  |

## More images:

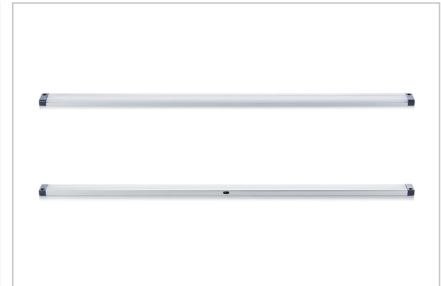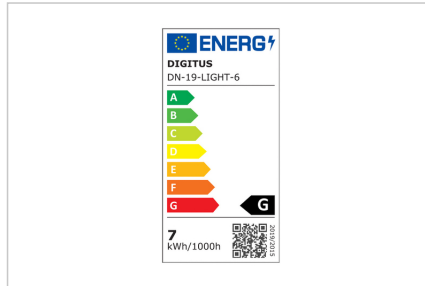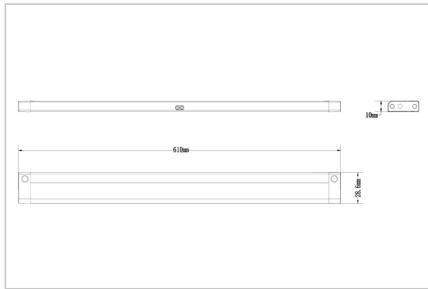

## Safety notes

- When installing and using the accessory product for network cabinets, observe the respective safety instructions of the manufacturer or the cabinet system in which you want to use the accessory.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)