


DIGITUS Modular plugs for round cable, Pass through connector

A-MO 8/8 SR
EAN 4016032065173

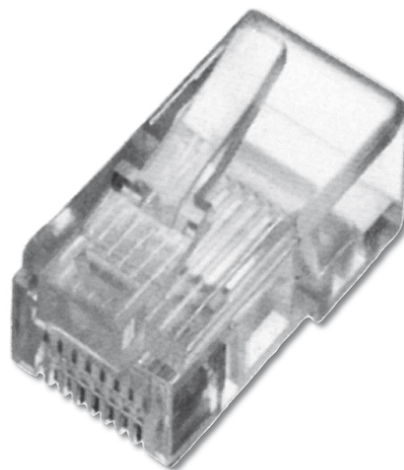

Modular Plug, for stranded Round Cable, 8P8C unshielded, pass through connector

These modular plugs can be used to establish quick and simple connections.

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 5e, 10/100Base-T, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:

- UL certified
- Technical properties:
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10000	16.90	41.30	38.10	20.30	31,942.70
Packaging Unit Inside	100	0.17	4.00	12.00	16.00	768.00
Packaging Unit Single	1	0.00	2.10	1.00	0.70	1.47
Net single without Packaging	1	0.00	2.10	1.00	0.70	0.00

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com