


DIGITUS CAT 5e, Class D, wall outlet, shielded, surface mount

DN-9002/B5-N
EAN 4016032175698

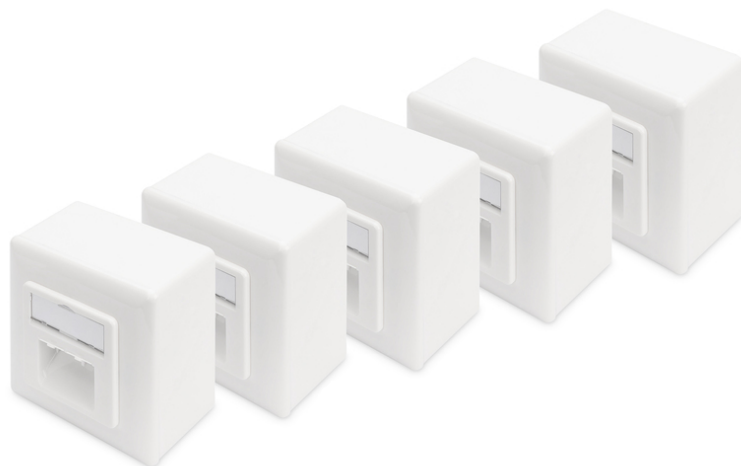

CAT 5e wall outlet, shielded, 2x RJ45 8P8C, LSA, pure white, surface mount, set=5 pcs.

The shielded CAT 5e network outlets from DIGITUS® are certificated to CAT 5e EIA/TIA 568 and ISO/IEC 11801, EN 50173. The cable installation takes place via LSA strips, color coded acc. EIA/TIA 568 B with horizontal cable entry. All network outlets from DIGITUS® are available flush mount or surface mount.

Future-oriented standards and high-end quality for your network.

- Transmission property: Category 5e
- Area of application: Up to 100 MHz, 10/100Base-T, 1GBase-T
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for installation in trunking, surface and flush mount
- RJ45 female, 8P8C
- Cable installation via LSA strips, color coded according to EIA/TIA 568 A & B
- Integrated strain relief for installation cables
- Complete shielding of RJ45 sockets and LSA strips due to zinc die-cast housing
- Strain relief 40°-angled female for patch cord
- Central plate: 50 x 50 mm
- Frame: 80 x 80 mm
- Central plate with integrated dust covers
- Design compatible to common switch ranges
- Technical properties:

- Housing material: Die-cast metal
- RJ45 female material: ABS UL 94V-0
- RJ45 female contact: Tinned phosphor bronze, 0.5 µ gold-plated contact
- RJ45 shielding: Tinned bronze
- LSA termination clamp: Krone LSA+, UL 94V-2, zinc plated phosphor bronze
- Conductor plate: FR4, UL 94V-0
- Physical properties:
- Insertion force: 30N max. (IEC 60603-7-5)
- Retention strength: 7.7 kg between jack and plug
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Clamp: > 200 acc. to ISO/IEC 11801, IEC 60603-7-5
- IDC wire size: 22 – 26 AWG solid and stranded conductor
- Insulation resistance: > 500 MOhm
- Contact resistance: < 20 MilliOhm
- Dielectric strength: 1000 VDC (Contact/Contact), 1500 VDC (Contact/Ground)
- Not compatible with R&M freenet patch cords
- Colour: White RAL9003
- Colour: White RAL9003

Package contents

- Outlet
- Mounting instruction

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 12 | 15.28 | 38.00 | 29.00 | 30.00 | 33,060.00 |
| Packaging Unit Inside | 1 | 1.27 | 9.50 | 24.50 | 9.00 | 2,094.75 |
| Packaging Unit Single | 1 | 1.27 | 9.50 | 24.50 | 9.00 | 2,094.75 |
| Net single without Packaging | 1 | 0.19 | 3.80 | 8.00 | 8.00 | 288.00 |

