


# DIGITUS Datatransfer connection cable, D-Sub9/F - D-Sub9/F

AK-610106-050-E  
EAN 4016032301158

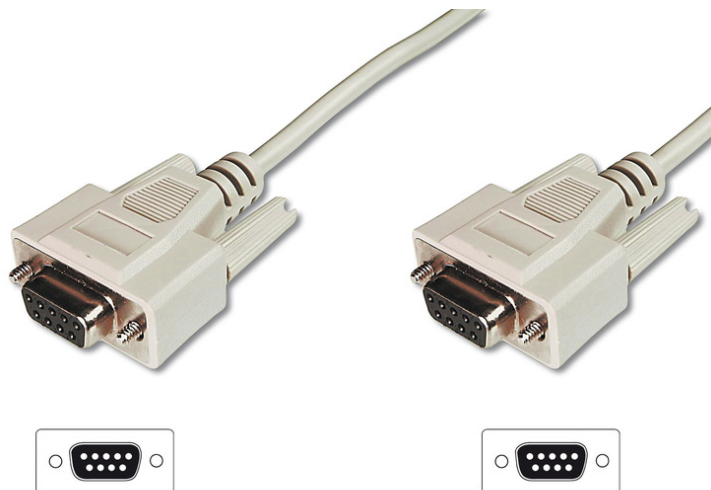

## Datatransfer connection cable, D-Sub9 F/F, 5.0m, serial, molded, be

Datatransfer connection cable, D-Sub9,F/F, 5.0m, serial, molded, be

### Enables a save and stable connection

#### Attributes

- Assignment: 1:1
- Assortment: Serial Cables
- AWG: 26

- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 5 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	70	15.00	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	5	1.07	22.00	22.00	10.00	4,840.00
Packaging Unit Single	1	0.21	3.00	16.00	25.00	1,200.00
Net single without Packaging	1	0.21	2.00	12.50	13.50	0.00

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)