

DIGITUS mini GBIC (SFP) Module, 1.25 Gbps, 80km

DN-81002
EAN 4016032305675



1.25 Gbps SFP Module, Singlemode LC Duplex Connector, 1550nm, up to 80km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant


- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-ZX - For Long Haul
- Wavelength: 1550nm
- Transmission Power: Minimum 0 dBm, Maximum 5 dBm
- Sensitivity Receiving Power: Minimum -32 dBm
- For a Distance of up to 80km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 80
- Wavelength: 1550 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	9.00	11.50	3.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

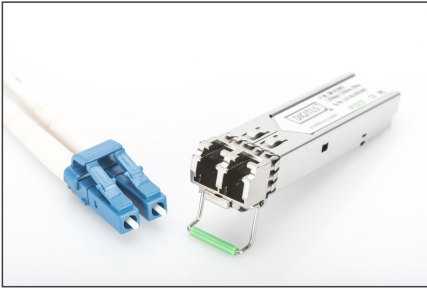

Part Number	Data Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Model
SFP Modules							
Plastic Housing							
Dig-4100	42700020050	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4101	42700020070	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4102	42700020082	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Plastic Housing							
Dig-4103	42700020091	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4104	42700020100	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4105	42700020102	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4106	42700020120	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4107	42700020121	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
19U							
Dig-4108	42700020130	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Dig-4109	42700020140	1.0 Gbps	10km	LC Duplex	100°C	-40 to 70 °C	✓
Full Feature							
Dig-4110	42700020150	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓
Dig-4111	42700020160	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓
Dig-4112	42700020170	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓
Dig-4113	42700020180	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓
Dig-4114	42700020190	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓
Dig-4115	42700020200	1.0 Gbps	10km	LC Duplex	100°C	-40 to 85 °C	✓