


DIGITUS Cat.6 U/UTP installation cable, 305 m, simplex, Eca

DK-1613-VH-305
EAN 4016032324553

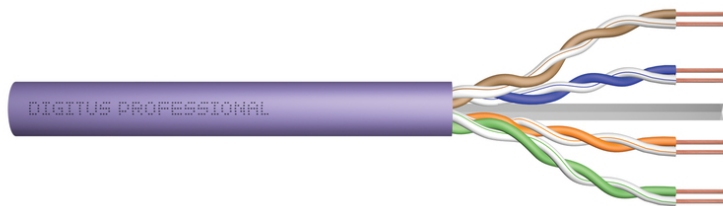

CAT 6 U-UTP installation cable, 250 MHz Eca (EN 50575), AWG 23/1, 305 m paper box, sx, pu

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: None
- Overall shielding: None
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness nominal): 0.5 mm (Eca); 0.6 mm (Dca); 1.0 mm (Cca); 1.0 mm (B2ca)
- Outer casing color: Violet (RAL 4005)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +75 °C






- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 6.1 mm (Eca); 6.3 mm (Dca); 6.8 mm (Cca); 6.8 mm (B2ca)
- Weight (kg/km): 41 kg (Eca); 42 kg (Dca); 44 kg (Cca); 44 kg (B2ca)
- Electrical properties:
- Impedance: 100±50Ω @ 1 - 250MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-earth): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- Loop resistance: 147 Ωm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Phase delay: 535 nS/100 m max.
- Time delay: 20 nS/100 m max.
- Isolation class: "b" according to EN 50174-2
- NVP: 69%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Inside	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Single	1	12.30	45.00	44.50	25.00	50,062.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

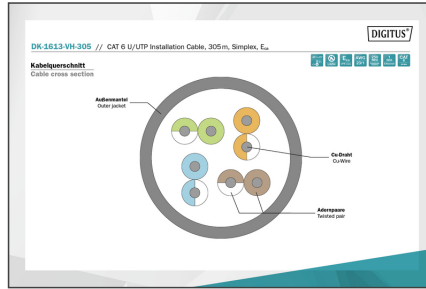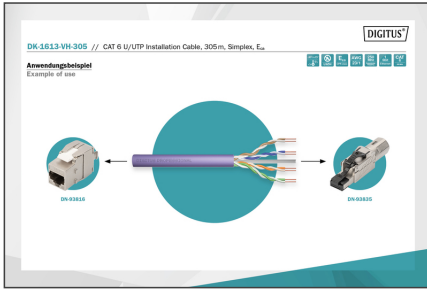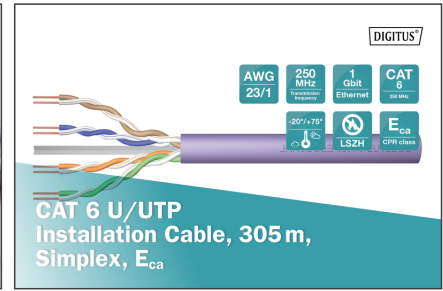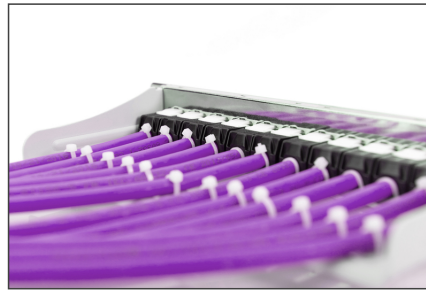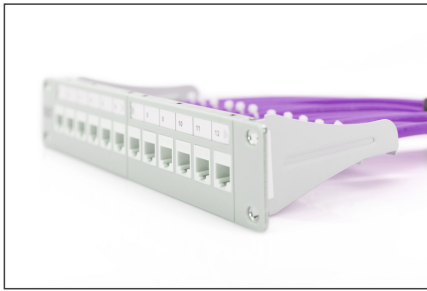

Product information table with sections: Produktinformationen, Physikalische Spezifikationen, Elektrische Eigenschaften, and Mechanische Eigenschaften.

Table with columns: AWG, CAT, NEXT, PR-NEXT, ACR, PL-ACR, PL, PL-NEXT, PL-NEXT. Contains technical data for various cable types.

Certificate and Zertifikat for GHMT approval, Class E. Includes approval details and contact information.

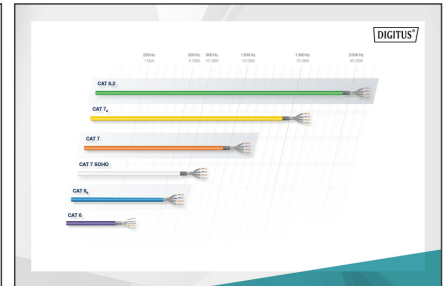


Table with columns: CPR Einstufung, Brennverhalten, Leitungsbrandverhalten, and Zerstörungsvermögen. Lists performance classes like B2ca, Cca, Dca, Eca, Cca, s1a, d1, a1.



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
Installation only by trained specialists.
Installation only in dry rooms.
The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.
ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com