

# DIGITUS Audio Extension Cable, Stereo

AK-510200-050-S  
EAN 4016032325390



**Audio extension cable, stereo 3.5mm 5.00m, CCS, 2x0.10/10, shielded, M/F, black**

Audio extension cable, stereo 3.5mm, 5.00m, CCS, 2x0.10/10, shielded, M/F, black

- 3.5mm stereo plug <=> 3.5mm stereo jack
- Molded housing
- Cable CCS, shielded

## Attributes



- Assortment: Audio Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 3.5mm stereo jack
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CCS
- Length: 5 m
- Shielding: Unshielded

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	13.00	39.50	34.00	21.50	28,874.50
Packaging Unit Inside	5	0.65	23.00	17.00	4.50	1,759.50
Packaging Unit Single	1	0.13	16.50	5.00	2.00	165.00
Net single without Packaging	1	0.09	16.50	5.00	2.00	0.00

## More images:

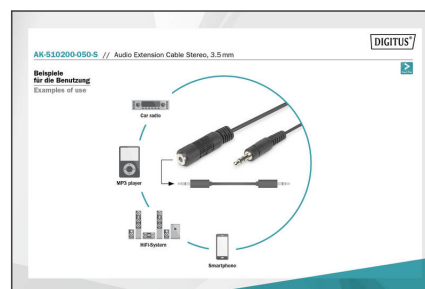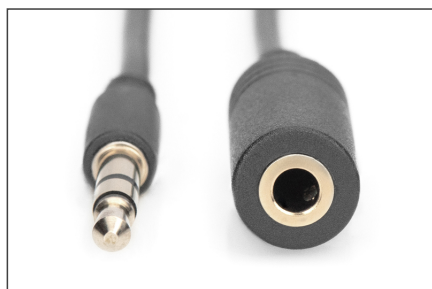



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schöffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)