


DIGITUS Cat. 7A S/FTP, installation cable, 500 m, simplex, Dca-s1a d1 a1

DK-1743-A-VH-5
EAN 4016032363842

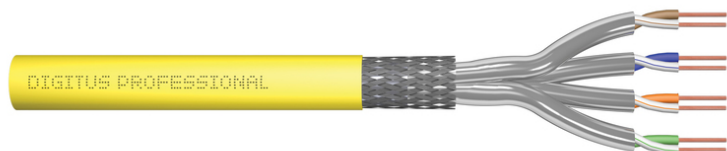

CAT 7A S-FTP installation cable, 1500 MHz, Dca AWG 22/1, 500 m drum, Sx, yellow

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) for the assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: tinned copper braiding
- Outer sheath: Dca to Cca according to EN 50575; LSZH
- Outer sheath thickness (nominal): 0.60 mm (Dca); 0.60 mm (Cca)
- Outer sheath color: Yellow (RAL 1028)
- Mechanical properties:
- Strain relief: 150 N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C


- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter (nominal): 7.8 mm (Dca); 7.8 mm (Cca)
- Weight (kg/km): 65 kg (Dca); 65 kg (Cca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-1000 MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 147 Ohm/Km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density: EN 61034-2

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	33.50	53.00	53.00	43.50	122,192.00
Packaging Unit Inside	1	33.50	53.00	53.00	43.50	122,192.00
Packaging Unit Single	1	33.50	53.00	53.00	43.50	122,192.00
Net single without Packaging	1	34.00	0.00	0.00	0.00	0.00

More images:

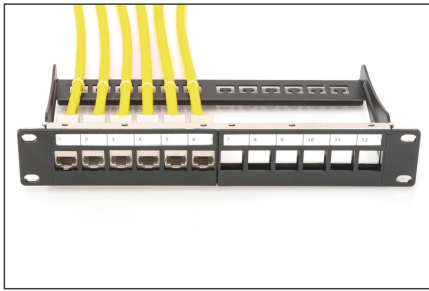

DIGITUS


1500 MHz	10 Cat.11 Ethernet	CAT 7A 1000MHz
AWG 22/1	LSZH	D _{ca} CPR class

CAT 7 A S/FTP Installation Cable, 500 m, Simplex, D_{ca}

DK-1743-A-VHS // CAT 7 A S/FTP Installation Cable, 500m, Simplex, D_{ca}

Anwendungsbeispiel
Example of use

DK-9555A

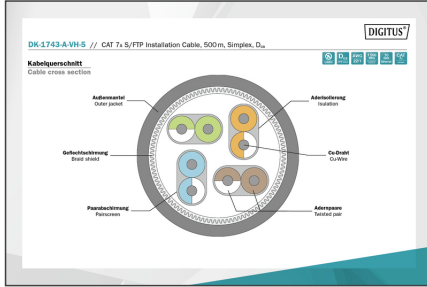

DIGITUS

Produktdaten Product Information	Physikalische Spezifikationen Physical Properties
Hersteller ASSMANN Electronic GmbH, 96126 Bamberg, Germany ASSMANN Electronic GmbH, 96126 Bamberg, Germany ASSMANN Electronic GmbH, 96126 Bamberg, Germany	Lebensdauer 100 Jahre 100 Jahre 100 Jahre
Material Cable: PVC Shielding: LSZH Cable jacket: PVC	Brandmarken ASSMANN Electronic GmbH, 96126 Bamberg, Germany ASSMANN Electronic GmbH, 96126 Bamberg, Germany ASSMANN Electronic GmbH, 96126 Bamberg, Germany
Technische Daten Nominal speed: 1000 Mbit/s (100 MHz) Nominal distance: 100 m (328 ft) Nominal bandwidth: 1500 MHz Nominal diameter: 10.5 mm (0.413 in)	Elektrische Eigenschaften Electrical Properties Nominal speed: 1000 Mbit/s (100 MHz) Nominal distance: 100 m (328 ft) Nominal bandwidth: 1500 MHz Nominal diameter: 10.5 mm (0.413 in)
Abmessungen Nominal diameter: 10.5 mm (0.413 in) Nominal length: 500 m (1640 ft)	Mechanische Eigenschaften Mechanical Properties Tensile strength: 100 N (22.5 lbf) Bending radius: 100 mm (3.94 in) Temperature range: -40 to +75 °C (-40 to +165 °F)

DIGITUS

Leistungsleistungen, Transmission Properties

Paar	STP	MDT	PL-MDT	ACH	PL-ACH	PL	SL-PT	PL-PT
1	10	10	10	10	10	10	10	10
2	10	10	10	10	10	10	10	10
3	10	10	10	10	10	10	10	10
4	10	10	10	10	10	10	10	10
5	10	10	10	10	10	10	10	10
6	10	10	10	10	10	10	10	10
7	10	10	10	10	10	10	10	10
8	10	10	10	10	10	10	10	10
9	10	10	10	10	10	10	10	10
10	10	10	10	10	10	10	10	10
11	10	10	10	10	10	10	10	10
12	10	10	10	10	10	10	10	10
13	10	10	10	10	10	10	10	10
14	10	10	10	10	10	10	10	10
15	10	10	10	10	10	10	10	10



GHMT

Certificate
No. 18874-21

Zertifikat
Nr. 18874-21

Class 5.

GHMT Type Approval

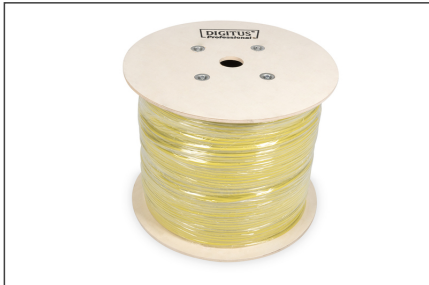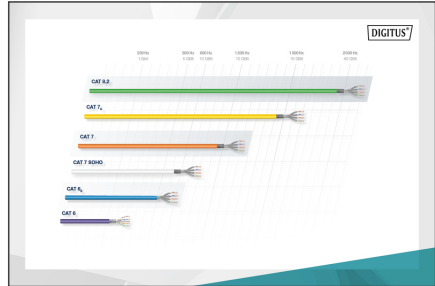

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com